

## AMP Signal Double Lock

TE Internal #: 5-316087-1

Rectangular Connector Housings, Wire-to-Wire, 5.88 Newton Insertion Force, 3 Position, .098 in [2.5 mm] Centerline, 1 Row, AMP

Signal Double Lock

View on TE.com >



Connectors > Rectangular Connectors > Rectangular Connector Housings > Glow Wire Signal Double Lock Cap











Connector System: Wire-to-Wire

Insertion Force: 5.88 Newton

Number of Positions: 3

Centerline (Pitch): 2.5 mm [ .098 in ] Row-to-Row Spacing: 2.5 mm [ .01 in ]

All Glow Wire Signal Double Lock Cap (7)

## **Features**

## **Product Type Features**

Connector System	Wire-to-Wire
Connector & Housing Type	Receptacle
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Connector Type	Housing
Product Type	Connector

## **Configuration Features**

Insertion Force	5.88 Newton
Number of Positions	3
Number of Rows	1
Preloaded	No

## **Electrical Characteristics**



Operating Voltage	250 VDC
Contact Features	
Multiple Contact Types	Without
Shunts/Shorting Bars	Without
Contact Type	Tab
Contact Current Rating (Max)	3 A
Mechanical Attachment	
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	2.5 mm[.098 in]
Housing Material	Nylon 66
Housing Color	Natural
Dimensions	
Row-to-Row Spacing	2.5 mm[.01 in]
Width	9.6 mm
Usage Conditions	
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
Operation/Application	
Assembly Integration Feature	Without
Circuit Application	Signal
Identification Marking	
Circuit Identification Feature	Without
Industry Standards	
CSA Rating	LR 7189
Agency/Standard	CSA, UL, VDE
CSA Certified	Yes
CSA File Number	LR7189
VDE Tested	Yes
UL File Number	E28476
UL Rating	Recognized
Packaging Features	



Packaging Quantity	200
Packaging Method	Bag

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**
















# Also in the Series | AMP Signal Double Lock

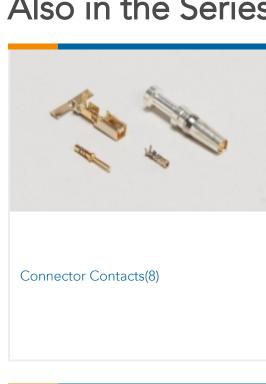







Insertion & Extraction Tools(1)

PCB Headers & Receptacles(145)

PCB Latches, Locks & Retainers(17)



Rectangular Caps & Covers(1)



Rectangular Connector Housings(23)



Rectangular Connector Locking(2)



Rectangular Connector Seals(10)





Standard Rectangular Connectors(1)





Wire-to-Board Connector Assemblies & Housings(76)

Wire-to-Board Connector Contacts(6)

## Documents

**Product Drawings** 

2.5 SIGNAL D/LOCK CAP HSG 3P(GWT)

English

**CAD Files** 

3D PDF

3D

**Customer View Model** 



ENG\_CVM\_CVM\_5-316087-1\_J.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_5-316087-1\_J.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_5-316087-1\_J.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

## Datasheets & Catalog Pages

1773458-3\_2.5MM\_SIGNAL\_DOUBLE\_LOCK\_CONNECTORS

English

**Instruction Sheets** 

Instruction Sheet (non U.S.)

English

AMP 2.5 SIGNAL DOUBLE LOCK CONNECTOR SERIES

English