

AMP | AMP MCP 2.8, AMP MCP Connector System

TE Internal #: 5-968975-1 Housing for Female Terminals, Wire-to-Wire, 21 Position, .197 in [5 mm] Centerline, Other, Signal, Cable Mount (Free-Hanging), Hybrid View on TE.com >



Connectors > Automotive Connectors > Connector Housings > AMP MCP Unsealed Connector Housings



Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: 2.8 mm [.11 in]

Connector System: Wire-to-Wire

Number of Positions: 21

Centerline (Pitch): 5 mm [.197 in]

All AMP MCP Unsealed Connector Housings (187)

Features

Product Type Features

Connector Shape	Rectangular
Connector & Housing Type	Housing for Female Terminals
Connector System	Wire-to-Wire
Sealable	No
Hybrid Connector	No
Primary Locking Feature	On the Terminal
Configuration Features	
Number of Positions	21
Number of Rows	2, 3
Electrical Characteristics	
Operating Voltage	42 VDC
Nominal Voltage Architecture	12 V, 24 V, 42 V
Body Features	

C For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 21 Position, .197 in [5 mm] Centerline, Other, Signal, Cable Mount (Free-Hanging), Hybrid



Cable Exit Angle	180°
Body Material	PBT GF
Primary Product Color	Other
Connector Code	D
Contact Features	
Contact Size	2.8mm
Contact Type	Receptacle
Mating Tab Width	2.8 mm[.11 in]
Mechanical Attachment	
Mounting Feature	Without
Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	

Centerline (Pitch)

5 mm[.197 in]

Dimensions						
Product Length	37.5 mm[1.476 in]					
Product Height	24 mm[.945 in]					
Usage Conditions						
Operating Temperature (Max)	70 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C, 130 °C, 140 °C[158 ° F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F][266 °F][284 °F]					
Operating Temperature Range	-40 - 140 °C[-40 - 284 °F]					
Operation/Application						
Circuit Application	Signal					
Industry Standards						
UL Flammability Rating	UL 94V-0					
Packaging Features						
Packaging Quantity	300					
Other						

C For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 21 Position, .197 in [5 mm] Centerline, Other, Signal, Cable Mount (Free-Hanging), Hybrid



Serviceable	No						
Connector Position Assurance Capable	No						
Product Compliance							
For compliance documentation, visit the product page on TE.com>							
EU RoHS Directive 2011/65/EU	Compliant						
EU ELV Directive 2000/53/EC	Compliant						
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold						
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC						
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.						
Solder Process Capability	Not reviewed for solder process capability						

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent

chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts



Housing for Female Terminals, Wire-to-Wire, 21 Position, .197 in [5 mm] Centerline, Other, Signal, Cable Mount (Free-Hanging), Hybrid






Also in the Series | AMP MCP 2.8




Automotive Terminals(6)	Insertion & Extraction Tools(6)	Module Components(1)	PCB Headers & Receptacles(1)	

Also in the Series AMP MCP Connector System

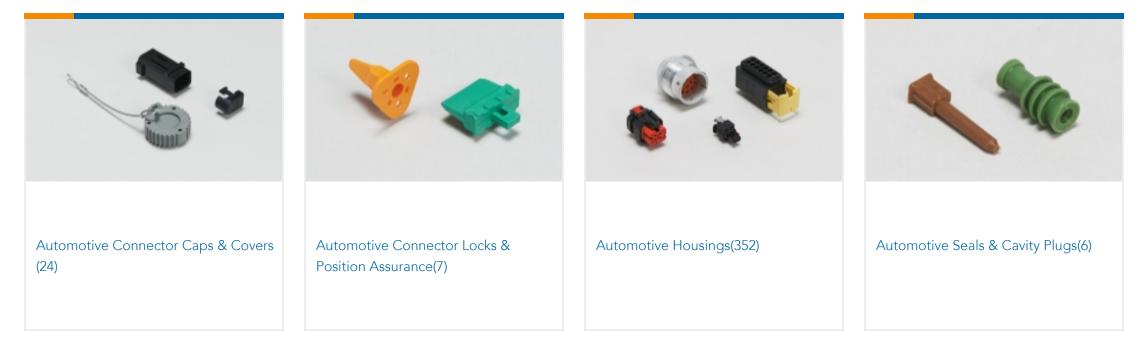

Housing for Female Terminals, Wire-to-Wire, 21 Position, .197 in [5 mm] Centerline, Other, Signal, Cable Mount (Free-Hanging), Hybrid



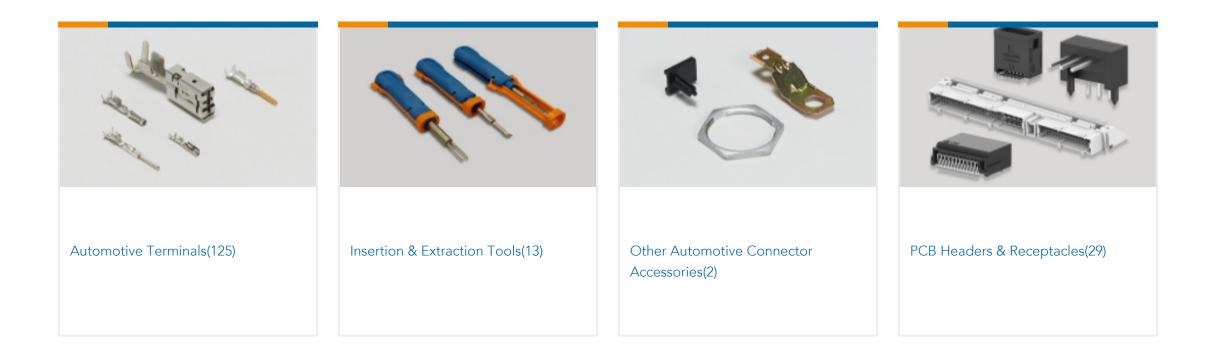

Documents

Product Drawings MCP2,8 GEH ASSY 21P

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5-968975-1_F.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5-968975-1_F.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5-968975-1_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English