

SHUR-PLUG 180

TE Internal #: 60799-2

Crimp Wire Pins, Tabs & Ferrules, Shur-Plug, Pin Diameter 4.57 mm [.18 in], 18 – 14 AWG Wire Size, .8 – 2 mm² Wire Size, SHUR-PLUG 180

View on TE.com >



Terminals & Splices > Crimp Wire Pins, Tabs & Ferrules











Crimp Wire Pin, Tab & Ferrule Terminal Type: Shur-Plug

Pin Diameter: **4.57 mm [.18 in]**

Accepts Wire Insulation Diameter Range: 2.29 – 3.17 mm, 3.17 mm [.09 – .125 in, .125 in]

Wire Size: .8 – 2 mm²

Features

Product Type Features

Compatible With Discrete Wire Type	Solid, Stranded
Configuration Features	
Compatible With Wire & Cable Type	Discrete Wire
Contact Features	
Crimp Wire Pin, Tab & Ferrule Terminal Type	Shur-Plug
Barrel Type	Open
Terminal Plating Material	Unplated
Terminal Orientation	Straight
Mechanical Attachment	
Wire Insulation Support	With

4.57 mm[.18 in]

in]

2.29 – 3.17 mm, 3.17 mm[.09 – .125 in][.125

Dimensions

Pin Diameter

Accepts Wire Insulation Diameter Range



Wire Size	1624 – 4106 CMA
Barrel Inside Diameter	1.65 mm, 2.66 mm[.065 in][.105 in]
Terminal Material Thickness	.39 mm[.016 in]
Overall Product Length	22.73 mm[.895 in]
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	-40 - 105 °C[-40 - 221 °F]
Operation/Application	
Heavy Duty	No

Packaging Features

Packaging Quantity	12000
Packaging Method	Reel

Other

Comment	No indent.

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits



as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

















Also in the Series | SHUR-PLUG 180

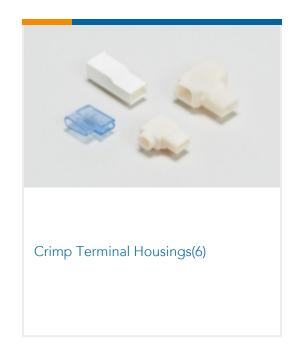



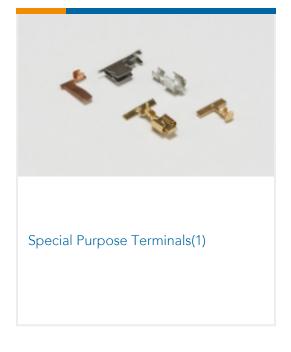

Documents

Product Drawings

SHUR PLUG 180 RECEPTACLE 18-14 AWG BR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_60799-2_AL.2d_dxf.zip

English



Customer View Model

ENG_CVM_CVM_60799-2_AL.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_60799-2_AL.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

Product Specifications

Application Specification

English

Product Environmental Compliance

TE Material Declaration

English