


FASTON | FASTON 110

TE Internal #: 62836-1 PCB Terminals, Tab, Mating Tab Width .11 in [2.8 mm], PCB Hole Diameter 1.02 – 1.17 mm [.046 – .04 in], Through Hole - Solder, Tin Plating, FASTON 110

View on TE.com >

Terminals & Splices > PCB Terminals

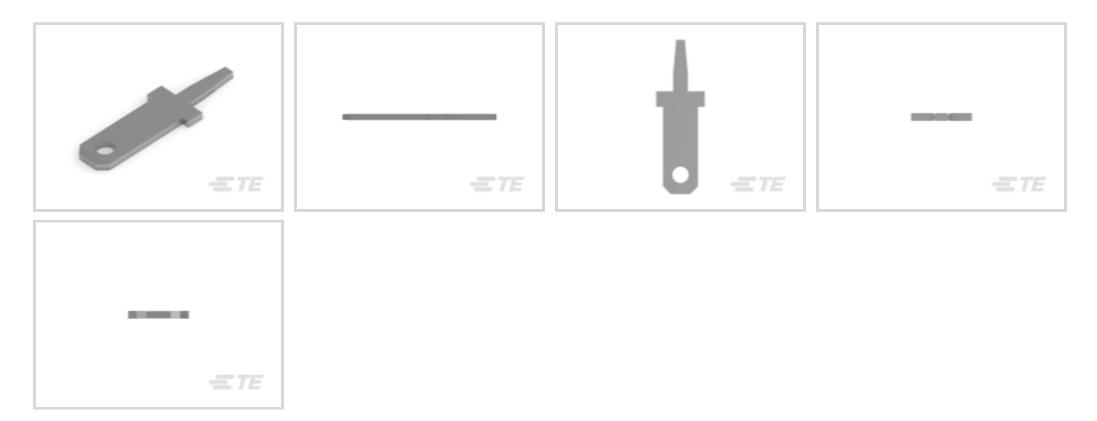

PCB Terminal Type: Tab

Mating Tab Width: 2.8 mm [.11 in]

PCB Hole Diameter: 1.02 – 1.17 mm [.046 – .04 in]

Termination Method to Printed Circuit Board: Through Hole - Solder

Terminal Plating Material: Tin

Features



Configuration Features

Stud Hole	No
Terminal Angle	180 °
Contact Features	
Contact Plating Material	Tin
PCB Terminal Type	Tab
Mating Tab Width	2.8 mm[.11 in]
Terminal Plating Material	Tin
Contact Underplating Material	Brass
Terminal Size	2.8
Terminal Orientation	Straight
Termination Features	
Termination Method to Printed Circuit Board	Through Hole - Solder
Product Terminates To	Printed Circuit Board
Dimensions	

C For support call+1 800 522 6752

62836-1

PCB Terminals, Tab, Mating Tab Width .11 in [2.8 mm], PCB Hole Diameter 1.02 – 1.17 mm [.046 – .04 in], Through Hole - Solder, Tin Plating, FASTON 110



Receptacle Terminal Stock Thickness	.51 mm[.02 in]
PCB Hole Diameter	1.02 – 1.17 mm[.046 – .04 in]
Jsage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	-30 – 110 °C[-22 – 230 °F]
Packaging Features	
Packaging Method	Bag
For compliance documentation, visit the product page on TE.com>	Compliant
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Compliant
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC	Compliant
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	
EU ELV Directive 2000/53/EC	Compliant

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

62836-1

PCB Terminals, Tab, Mating Tab Width .11 in [2.8 mm], PCB Hole Diameter 1.02 – 1.17 mm [.046 – .04 in], Through Hole - Solder, Tin Plating, FASTON 110



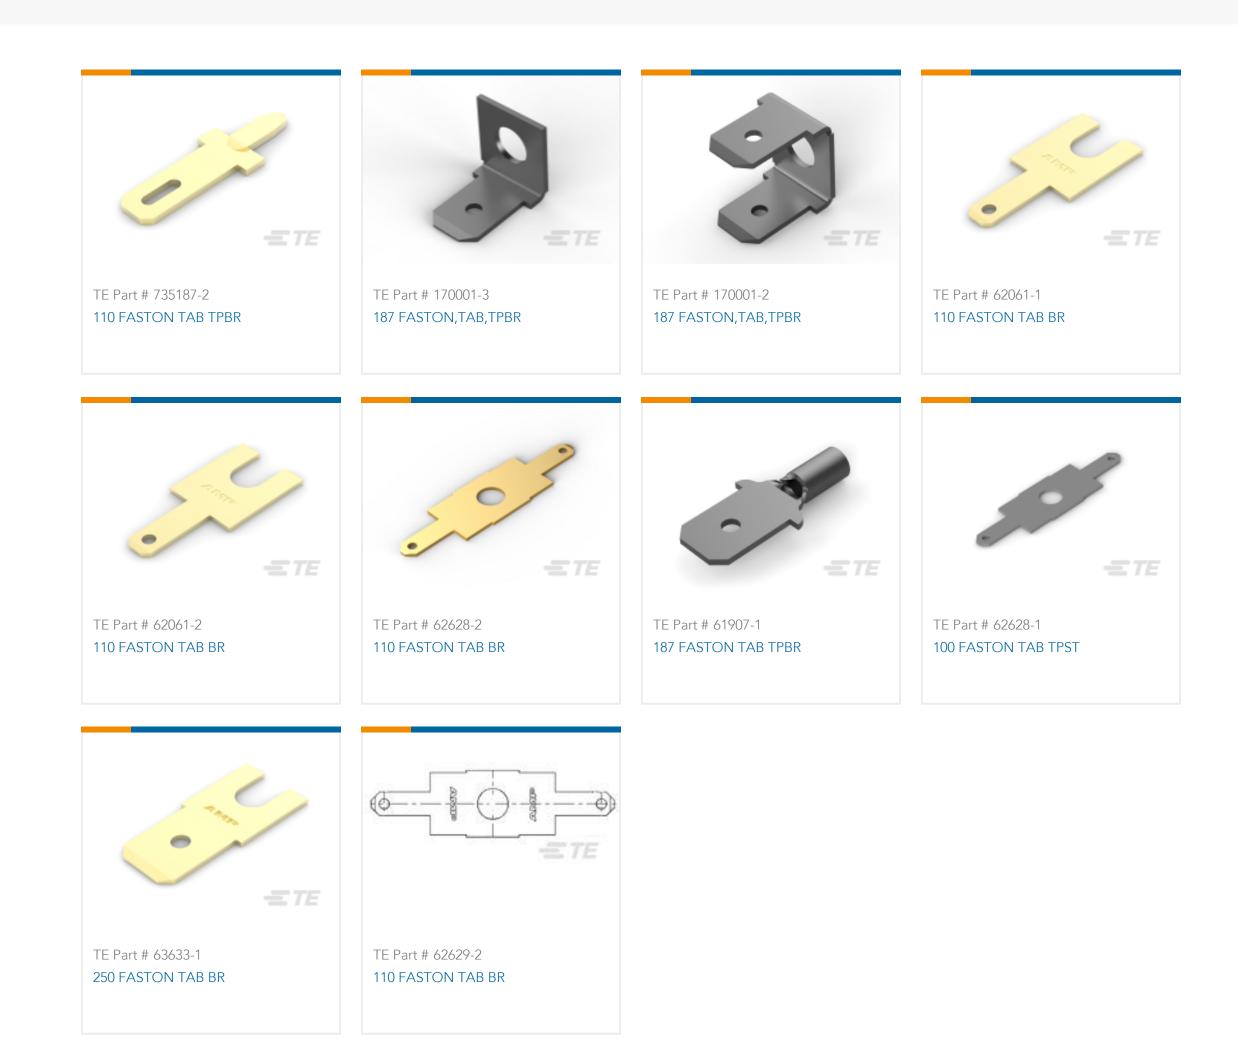

Also in the Series | FASTON 110

Crimp Terminal Housings(17)	Insertion & Extraction Tools(1)	PCB Terminals(21)	Quick Disconnects(174)

Documents

Product Drawings 110 FASTON TAB TPBR		
English		
CAD Files 3D PDF		
3D		
Customer View Model		

62836-1

PCB Terminals, Tab, Mating Tab Width .11 in [2.8 mm], PCB Hole Diameter 1.02 – 1.17 mm [.046 – .04 in], Through Hole - Solder, Tin Plating, FASTON 110



ENG_CVM_CVM_62836-1_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_62836-1_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_62836-1_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications Application Specification

English