
770343-1 🗸 ACTIVE

Commercial Pin and Socket Connectors

TE Internal #: 770343-1 Rectangular Connector Housings, Wire-to-Wire, 2 Position, .145 in [3.68 mm] Centerline, 1 Row, Nylon, Receptacle, Commercial Pin and Socket Connectors

View on TE.com >

Connectors > Rectangular Connectors > Rectangular Connector Housings

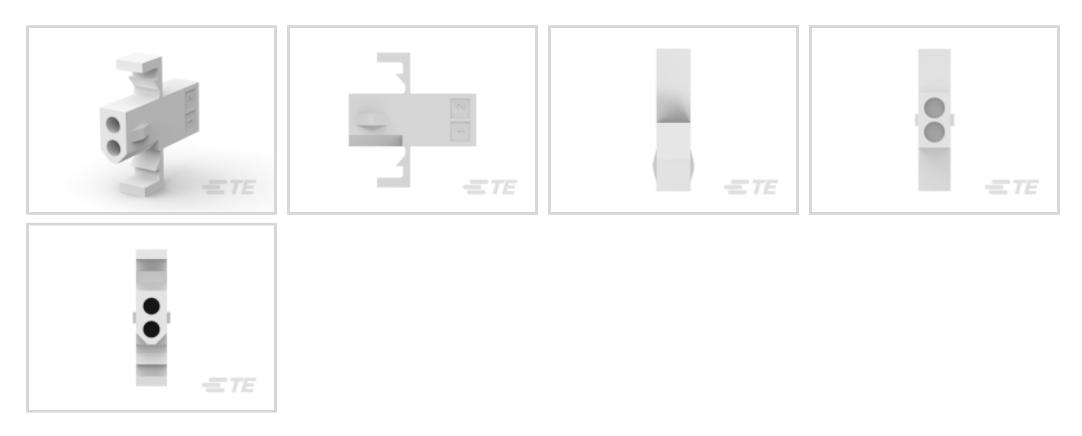

Connector System: Wire-to-Wire

Number of Positions: 2

Centerline (Pitch): 3.68 mm [.145 in]

Row-to-Row Spacing: 3.68 mm [.145 in]

Number of Rows: 1

Features



Product Type Features

Series Number	4500
Connector System	Wire-to-Wire
Connector & Housing Type	Receptacle
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Connector Type	Housing
Product Type	Connector
Wire/Cable Type	Discrete Wire
Configuration Features	
Number of Positions	2
Number of Rows	1
Electrical Characteristics	
UL Voltage Rating	250 VDC
Operating Voltage	250 VDC

Rectangular Connector Housings, Wire-to-Wire, 2 Position, .145 in [3.68 mm] Centerline, 1 Row, Nylon, Receptacle, Commercial Pin and Socket Connectors



Contact Features

Contact Type	Pin, Socket
Contact Transmits (Typical)	Power, Signal (Data)
Mechanical Attachment	
Panel Mount Feature	With
Panel Mount Feature Type	Mounting Ears
Connector Mounting Type	Cable Mount (Free-Hanging), Panel Mount
Housing Features	
Centerline (Pitch)	3.68 mm[.145 in]
Housing Material	Nylon
Housing Color	Natural
Dimensions	
Wire Size	.2 – .9 mm²
Row-to-Row Spacing	3.68 mm[.145 in]
Accepts Wire Insulation Diameter Range	1.27 – 2.79 mm[.05 – .11 in]
Height	5.05 mm[.199 in]
Length	20.83 mm[.82 in]
Width	8.64 mm[.34 in]
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Circuit Application	Power
Industry Standards	
CSA Rating	LR 7189
Agency/Standard	CSA, UL
CSA File Number	LR7189
VDE Tested	No
UL File Number	E28476
UL Flammability Rating	UL 94V-2
UL Rating	Recognized
Packaging Features	
Packaging Quantity	1

C For support call+1 800 522 6752

Rectangular Connector Housings, Wire-to-Wire, 2 Position, .145 in [3.68 mm] Centerline, 1 Row, Nylon, Receptacle, Commercial Pin and Socket Connectors



Packaging Method

Box

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Rectangular Connector Housings, Wire-to-Wire, 2 Position, .145 in [3.68 mm] Centerline, 1 Row, Nylon, Receptacle, Commercial Pin and Socket Connectors



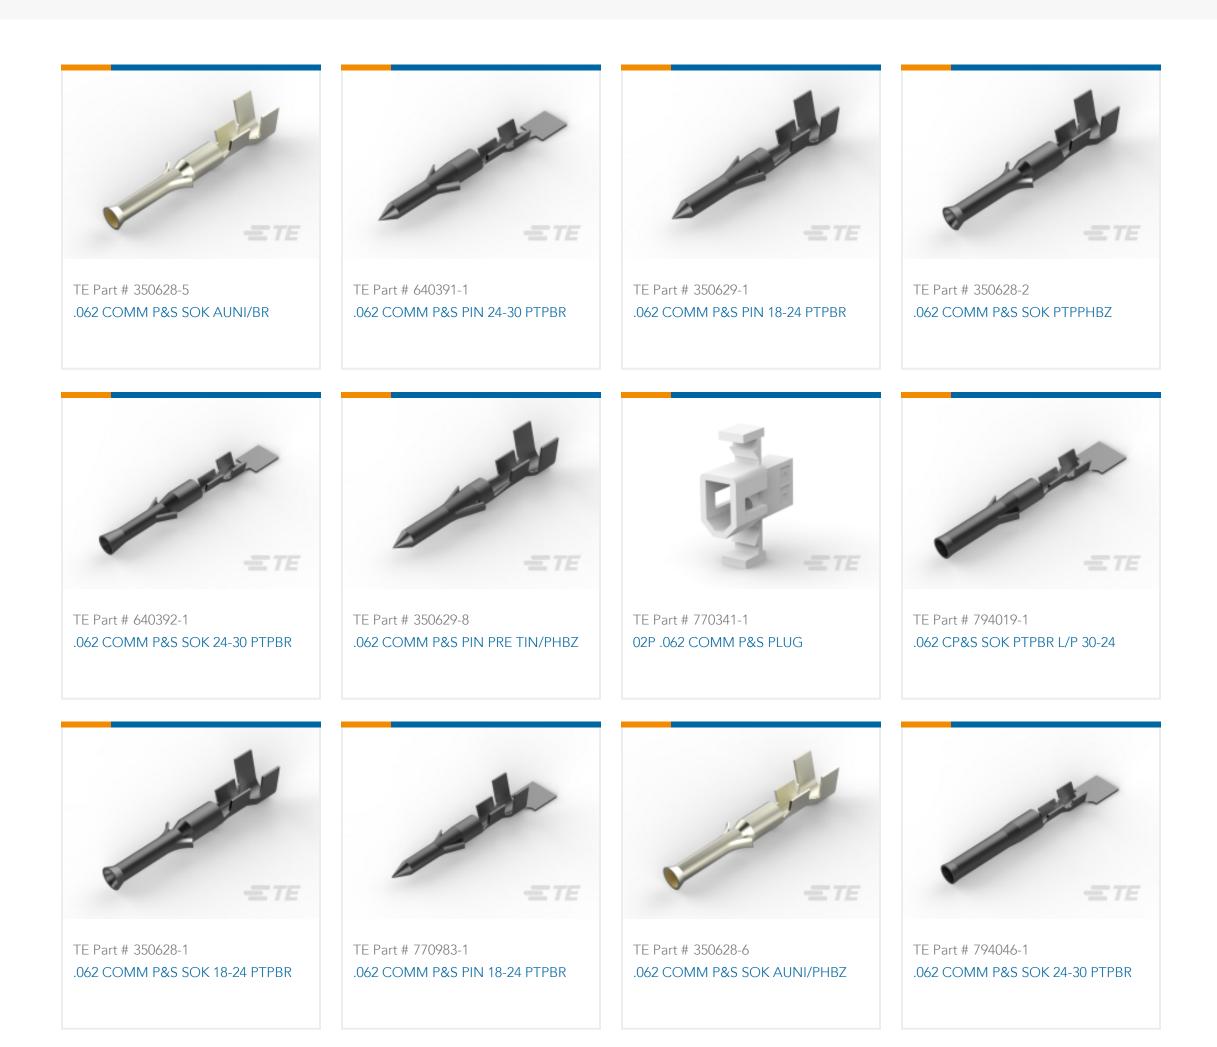



Also in the Series | Commercial Pin and Socket Connectors

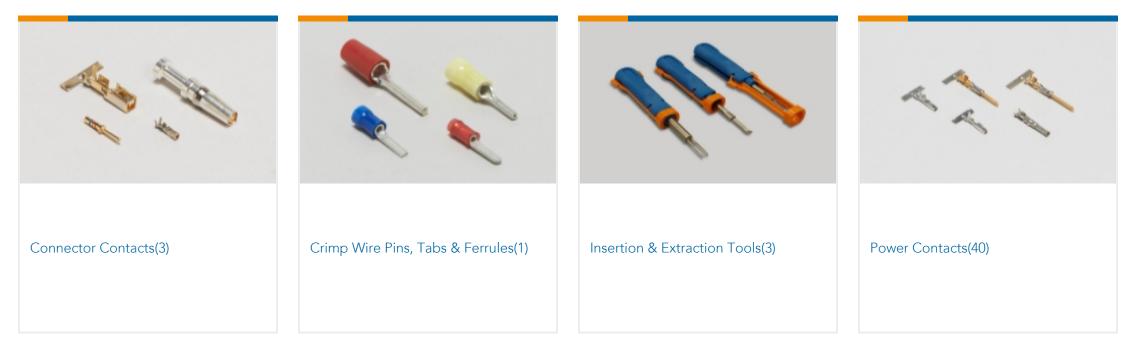

Rectangular Connector Housings, Wire-to-Wire, 2 Position, .145 in [3.68 mm] Centerline, 1 Row, Nylon, Receptacle, Commercial Pin and Socket Connectors





Documents

Product Drawings 02P .062 COMM P&S RECPT

English

CAD Files

Customer View Model ENG_CVM_770343-1_G.3d_igs.zip

English

Customer View Model

ENG_CVM_770343-1_G.3d_stp.zip

English

Customer View Model ENG_CVM_770343-1_G.2d_dxf.zip

English

3D PDF

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_770343-1_J.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_770343-1_J.3d_igs.zip

English

Customer View Model ENG_CVM_CVM_770343-1_J.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG

English

Product Specifications

Application Specification

& For support call+1 800 522 6752

Rectangular Connector Housings, Wire-to-Wire, 2 Position, .145 in [3.68 mm] Centerline, 1 Row, Nylon, Receptacle, Commercial Pin and Socket Connectors



English

Agency Approvals Agency Approval Document

English