


SOLISTRAND

TE Internal #: 8-34138-2 Splices, 12 – 10 AWG Wire Size, 3 – 6 mm² Wire Size, Standard, .129 in [3.28 mm] Barrel Inside Diameter, 5180 – 13100 CMA Wire Size, Copper

View on TE.com >

Terminals & Splices > Splices

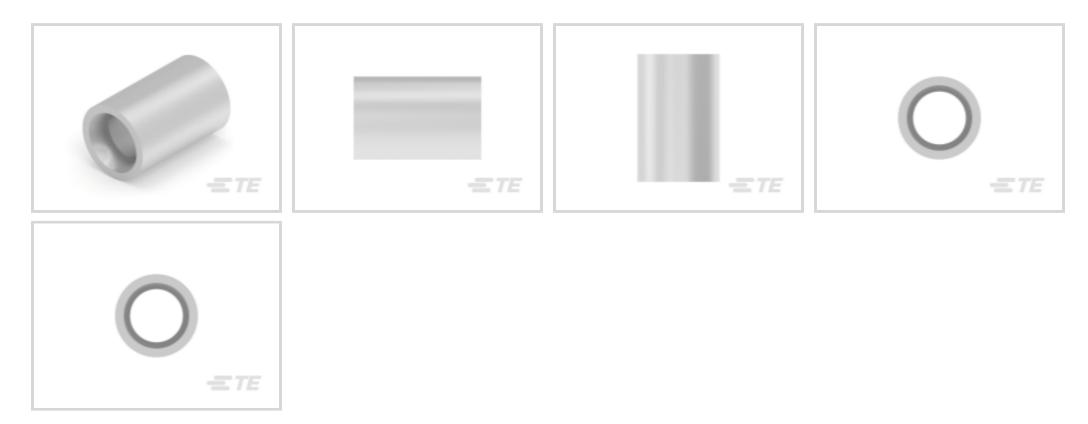

Wire Size: **3–6 mm²**

Sealable: No

Splice Features: Standard

Barrel Inside Diameter: 3.28 mm [.129 in]

Features

Product Type Features



Splice Accessory Type	Splice
Sealable	No
Splice Type	Parallel Splice
Serrated	Yes
Compatible With Discrete Wire Type	Stranded
Wire Insulation Support Retention Type	Non-Insulation Support
Configuration Features	
Compatible With Wire & Cable Type	Discrete Wire
Body Features	
Weight per Piece	1.281 g
Plating Material	Tin
Splice Features	Standard
Primary Product Material	Copper
Contact Features	

C For support call+1 800 522 6752

8-34138-2

Splices, 12 – 10 AWG Wire Size, 3 – 6 mm² Wire Size, Standard, .129 in [3.28 mm] Barrel Inside Diameter, 5180 – 13100 CMA Wire Size, Copper



	100 µin
Contact Plating Material	Tin
Barrel Type	Closed
Mechanical Attachment	
Wire Insulation Support	Without
Dimensions	
Outside Diameter	5.74 mm[.226 in]
Wire Size	5180 – 13100 CMA
Barrel Inside Diameter	3.28 mm[.129 in]
Terminal Material Thickness	1.07 mm[.042 in]
Overall Product Length	8.71 mm[.343 in]
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	170 °C[338 °F]
Operation/Application	
Heavy Duty	No
Compatible With Wire Base Material	Copper

Industry Standards

Government Qualified Splice	No
Packaging Features	
Packaging Quantity	50
Packaging Method	Loose Piece
Other	
Military Category	No
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224)

Splices, 12 – 10 AWG Wire Size, 3 – 6 mm² Wire Size, Standard, .129 in [3.28 mm] Barrel Inside Diameter, 5180 – 13100 CMA Wire Size, Copper



Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Halogen Content

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts





Documents

Product Drawings SPLICE, SOLIS PARA 12-10

English

CAD Files

Customer View Model

C For support call+1 800 522 6752

8-34138-2

Splices, 12 – 10 AWG Wire Size, 3 – 6 mm² Wire Size, Standard, .129 in [3.28 mm] Barrel Inside Diameter, 5180 – 13100 CMA Wire Size, Copper



ENG_CVM_CVM_8-34138-2_Y.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_8-34138-2_Y.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_8-34138-2_Y.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages SOLISTRAND - QRG

English

Product Environmental Compliance TE Material Declaration

English