

PLASTI-GRIP

TE Internal #: 8-34163-1


Ring Terminals & Spade Terminals, Ring Tongue, 16 – 14 AWG Wire Size, 1.04 – 2.62 mm² Wire Size, 2050 – 5180 CMA Wire Size,

PLASTI-GRIP

View on TE.com >



Terminals & Splices > Ring Terminals & Spade Terminals

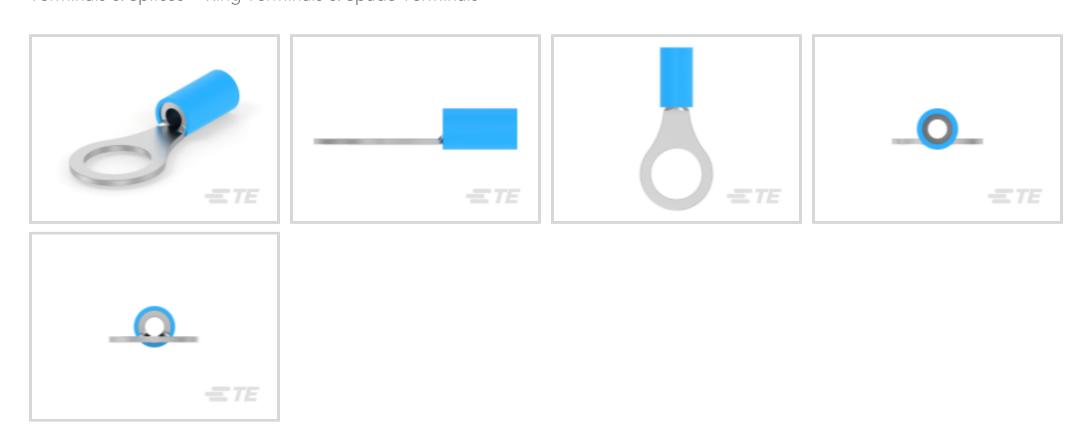

Ring & Spade Terminal Type: Ring Tongue

Wire Size: **2050 – 5180 CMA**

Stud Size: **5/16, M8**

Features

Product Type Features

Shape Description	RING-043
Stud Size	5/16, M8
Sealable	No
Wire Insulation Support Retention Type	Insulation Support
Configuration Features	
Number of Holes	1
Terminal Angle	180°
Electrical Characteristics	
Voltage (Max)	600 V
Body Features	
Inspection Slot	No
Weight per Piece	.953 g
Contact Features	
Ring & Spade Terminal Type	Ring Tongue

Closed

Barrel Type



Terminal Orientation	Straight	
Terminal Plating Material	Tin	
Mechanical Attachment		
Wire Insulation Support	With	
Dimensions		
Wire Size	2050 – 5180 CMA	
Stud Diameter	8.33 mm[.328 in]	
Tongue Thickness	.79 mm[.031 in]	
Overall Product Length	27.69 mm[1.09 in]	
Accepts Wire Insulation Diameter (Max)	4.9 mm[.193 in]	
Accepts Wire Insulation Diameter Range	3 – 4.9 mm[.118 – .193 in]	
Usage Conditions		
Usage Conditions Insulation Option	Partially Insulated	
	Partially Insulated 105 °C[221 °F]	
Insulation Option		
Insulation Option Operating Temperature Range		
Insulation Option Operating Temperature Range Operation/Application	105 °C[221 °F]	
Insulation Option Operating Temperature Range Operation/Application Compatible With Wire Base Material	105 °C[221 °F] Copper	
Insulation Option Operating Temperature Range Operation/Application Compatible With Wire Base Material Compatible With Wire Plating Material	105 °C[221 °F] Copper Tin	
Insulation Option Operating Temperature Range Operation/Application Compatible With Wire Base Material Compatible With Wire Plating Material Heavy Duty	105 °C[221 °F] Copper Tin	
Insulation Option Operating Temperature Range Operation/Application Compatible With Wire Base Material Compatible With Wire Plating Material Heavy Duty Industry Standards	105 °C[221 °F] Copper Tin No	
Insulation Option Operating Temperature Range Operation/Application Compatible With Wire Base Material Compatible With Wire Plating Material Heavy Duty Industry Standards Government Qualified	105 °C[221 °F] Copper Tin No	

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223)



Doos	not co	ntain	REACH	SV/HC
DOES	not co	ntain	KFACH	SVHU

Halogen Content	Not Low Halogen - contains Br or Cl > 900
	ppm.

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts
















Also in the Series | PLASTI-GRIP

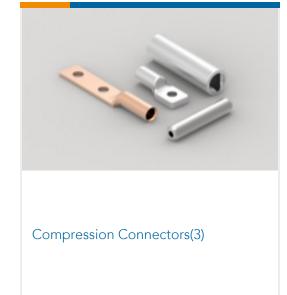



Crimp Wire Pins, Tabs & Ferrules(25)



Ring Terminals & Spade Terminals(537)





Documents

Product Drawings

TERMINAL,PG R 16-14 5/16

English

CAD Files

Customer View Model

ENG_CVM_CVM_8-34163-1_V.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_8-34163-1_V.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_8-34163-1_V.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

English