

AMP | Junior Power Timer

TE Internal #: 967558-1 Housing for Female Terminals, Wire-to-Wire, 24 Position, .197 in [5 mm] Centerline, Black, Wire & Cable, Power, Junior Power Timer View on TE.com >



Connectors > Automotive Connectors > Connector Housings > TIMER, CONNECTOR HOUSING



Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: 2.8 mm [.11 in]

Connector System: Wire-to-Wire

Number of Positions: 24

Centerline (Pitch): 5 mm [.197 in]

All TIMER, CONNECTOR HOUSING (541)

Features

Product Type Features

Connector Shape

Connector & Housing Type

Rectangular

Housing for Female Terminals

Connector System	Wire-to-Wire
Sealable	No
Hybrid Connector	No
Primary Locking Feature	On the Terminal
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	24
Number of Rows	2
Electrical Characteristics	
Nominal Voltage Architecture	12 V
Body Features	
Body Material	PBT GF
Primary Product Color	Black
Connector Code	A1
Contact Features	

C For support call+1 800 522 6752

967558-1

Housing for Female Terminals, Wire-to-Wire, 24 Position, .197 in [5 mm] Centerline, Black, Wire & Cable, Power, Junior Power Timer



Contact Size	2.8mm
Contact Type	Receptacle
Mating Tab Width	2.8 mm[.11 in]
Contact Current Rating (Max)	30 A
	30 A
Mechanical Attachment	
Terminal Position Assurance	No
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	5 mm[.197 in]
Dimensions	
Product Width	23.8 mm[.937 in]
Product Length	93.6 mm[3.685 in]
Product Height	38.25 mm[1.506 in]
Row-to-Row Spacing	6 mm[.236 in]

Usage Conditions

Operating Temperature (Max)	130 °C[266 °F]
Operating Temperature Range	-40 – 130 °C[-40 – 266 °F]
Operation/Application	
Circuit Application	Power
Packaging Features	
Packaging Method	Carton
Other	
Serviceable	No
Connector Position Assurance Capable	No
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant

C For support call+1 800 522 6752

967558-1

Housing for Female Terminals, Wire-to-Wire, 24 Position, .197 in [5 mm] Centerline, Black, Wire & Cable, Power, Junior Power Timer



China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Also in the Series | Junior Power Timer

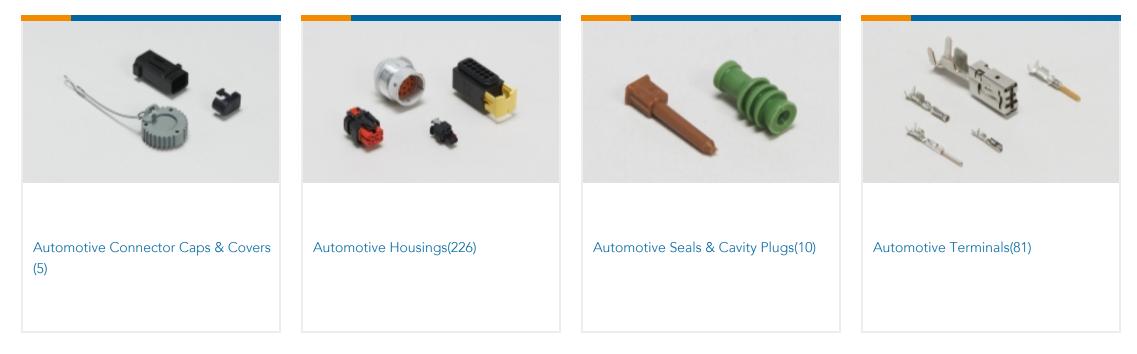

967558-1

Housing for Female Terminals, Wire-to-Wire, 24 Position, .197 in [5 mm] Centerline, Black, Wire & Cable, Power, Junior Power Timer



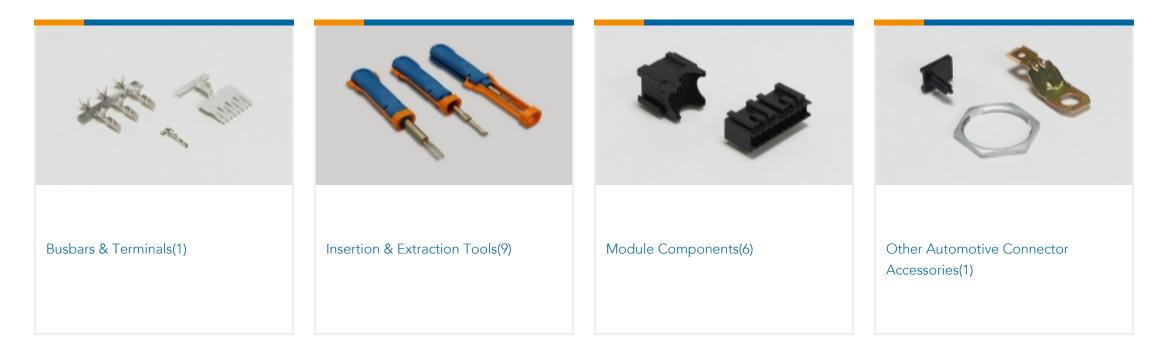



PCB Headers & Receptacles(1)

Documents

Product Drawings J-P-T GEH 24P,ASSY

English

CAD Files 3D PDF

English

Customer View Model

ENG_CVM_967558-1_B1.3d_igs.zip

English

Customer View Model

ENG_CVM_967558-1_B1.3d_stp.zip

English

Customer View Model

ENG_CVM_967558-1_B1.2d_dxf.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages Timer Interconnection System

English