



OVERHEAD
Trubolt®
Seismic Wedge Anchors



Benefits

- Approved for Cracked Concrete/Seismic Applications in Concrete and Metal Deck
- Overhead Anchor Assembly Includes: Anchor, Coupling Nut and Washer — NO Additional Components Required
- Fast Installation — Drive Anchor Assembly and Torque Coupling Nut
- High Performance Achieved Using Shallow Embedment
- ICC-ES ESR-2427




Applications

- Metal Deck 3/8" Threaded Rod Applications
- Pipes/Plumbing
- Heavy Electrical Lighting & Fixtures
- HVAC Equipment & Fixtures



Faster, Simple Installation

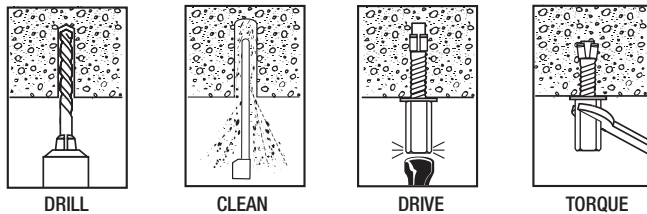

PART NUMBER	ANCHOR DIAMETER / LENGTH	DRILL BIT SIZE	EMBEDMENT DEPTH	COUPLING NUT	SETTING TORQUE*	QTY/WT PER BOX LBS.	QTY/WT PER MASTER LBS.
CWS-38CN	3/8" - 16 Thread 2-1/2" Length	3/8"	2"	3/8" - 16 Thread 1-3/4" Length	30 ft.-lbs.	40 / 7.6	320 / 45.4

* Setting torque only applies at the time of installation.

