

Owner's Manual

HDMI Active Extender

Model: B122-000-60

Package Contents:

- B122-000-60 HDMI Active Extender
- Owner's Manual

Product Features:

- Extend a 1080p (60Hz) signal up to 150 ft. from the source, or extend a 1080i (60Hz) signal up to 200 ft. from the source
- Supports up to 36-bit Deep Color (12-bits per channel)
- Supports DTS-HD, Dolby True HD and 7.1 Channel surround sound audio
- HDCP compliant and 3D ready


Optional Accessories:

- P568-Series HDMI cables

PROTECT YOUR INVESTMENT!

Register your product for quicker service
and ultimate peace of mind.

You could also win an
ISOBAR6ULTRA surge protector—
a \$50 value!



www.tripplite.com/warranty




1111 W. 35th Street, Chicago, IL 60609 USA • www.tripplite.com/support

Copyright © 2014 Tripp Lite. All rights reserved. All trademarks are the property of their respective owners.

Installation

Notes:

1. Test to make sure the entire installation works properly before pulling cables through ceilings/walls.
2. The B122-000-60 has been designed for use with Tripp Lite P568-Series HDMI cables. To ensure maximum distance and performance, it is recommended that you use Tripp Lite P568-Series HDMI cabling. For distances over 75 ft., 24AWG cable such as Tripp Lite's P568-100-HD is required.
3. Although most installations will not require power, a Micro USB port is provided in the event power is needed. If an image does not appear after performing the following steps, connect a Micro USB cable from the port on the unit to a USB computer, monitor or USB wall charger port.

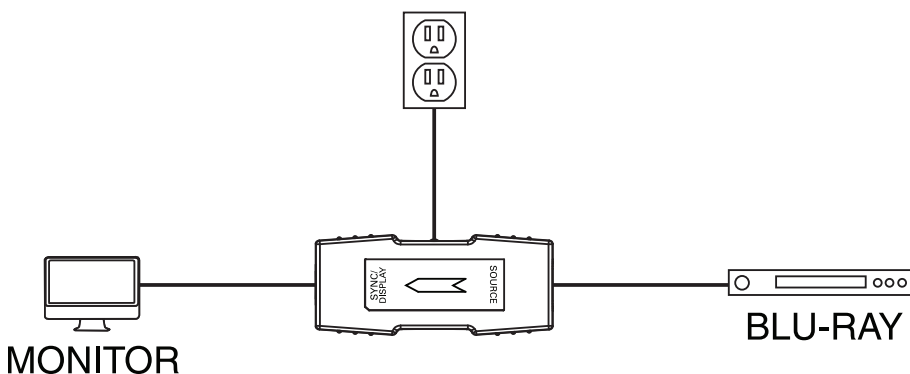

- 1** Connect the longer HDMI cable between the source and the SOURCE port on the B122-000-60. An internal green LED will illuminate to indicate power is being received from the connected device.

Note: When transmitting a 1080p (60Hz) signal, the HDMI cable connecting the source to the B122-000-60 must be no longer than 150 ft. When transmitting a 1080i (60Hz) signal, the HDMI cable connecting the source to the B122-000-60 must be no longer than 200 ft.

- 2** Connect the shorter HDMI cable between the HDMI monitor and the SYNC/DISPLAY port on the B122-000-60.

Note: The HDMI cable used to connect the monitor to the B122-000-60 must be no longer than 16 ft.

Warranty & Product Registration

1-Year Limited Warranty

TRIPP LITE warrants its products to be free from defects in materials and workmanship for a period of one (1) year from the date of initial purchase. TRIPP LITE's obligation under this warranty is limited to repairing or replacing (at its sole option) any such defective products. To obtain service under this warranty, you must obtain a Returned Material Authorization (RMA) number from TRIPP LITE or an authorized TRIPP LITE service center. Products must be returned to TRIPP LITE or an authorized TRIPP LITE service center with transportation charges prepaid and must be accompanied by a brief description of the problem encountered and proof of date and place of purchase. This warranty does not apply to equipment which has been damaged by accident, negligence or misapplication or has been altered or modified in any way.

EXCEPT AS PROVIDED HEREIN, TRIPP LITE MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Some states do not permit limitation or exclusion of implied warranties; therefore, the aforesaid limitation(s) or exclusion(s) may not apply to the purchaser.

EXCEPT AS PROVIDED ABOVE, IN NO EVENT WILL TRIPP LITE BE LIABLE FOR DIRECT, INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OF THIS PRODUCT, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE. Specifically, TRIPP LITE is not liable for any costs, such as lost profits or revenue, loss of equipment, loss of use of equipment, loss of software, loss of data, costs of substitutes, claims by third parties, or otherwise.

PRODUCT REGISTRATION

Visit www.triplite.com/warranty today to register your new Tripp Lite product. You'll be automatically entered into a drawing for a chance to win a FREE Tripp Lite product!*

* No purchase necessary. Void where prohibited. Some restrictions apply. See website for details.



WEEE Compliance Information for Tripp Lite Customers and Recyclers (European Union)

Under the Waste Electrical and Electronic Equipment (WEEE) Directive and implementing regulations, when customers buy new electrical and electronic equipment from Tripp Lite they are entitled to:

- Send old equipment for recycling on a one-for-one, like-for-like basis (this varies depending on the country)
- Send the new equipment back for recycling when this ultimately becomes waste

WARNING

Use of this equipment in life support applications where failure of this equipment can reasonably be expected to cause the failure of the life support equipment or to significantly affect its safety or effectiveness is not recommended. Do not use this equipment in the presence of a flammable anesthetic mixture with air, oxygen or nitrous oxide.

Tripp Lite follows a policy of continuous improvement. Product specifications are subject to change without notice.



1111 W. 35th Street, Chicago, IL 60609 USA • www.tripplite.com/support

14-09-193 93-33B5_revA