# Mach™ Tripoint™

# **KOHLER** Faucets Touchless retrofit toilet flushometer, DC-powered, 1.28

K-10TD00N10-RF

## **Features**

- 1.28 gpf (4.8 lpf)
- Activation distance is factory-set
- Chloramine and chlorine resistance on all rubber components exposed to waterway
- Engineered for optimal performance with KOHLER® commercial fixtures
- No external flush volume adjustment ensures water conservation
- 125-micron filter protects internal components
- 24-hour automatic sentinel flush keeps trapway fresh
- Mechanical override enables flushometer to be used manually even during a power outage
- Powered by 1.5V AA lithium batteries
- Less stop valve and tailpiece

#### Material

Brass construction with durable Polished Chrome finish

# Technology

- Electronic infrared sensor with Tripoint™ technology for accurate activation
- Patented piston technology for superior flush volume accuracy

## Installation

Intended for toilet installations with 1-1/2" (38 mm) top spud coupling connection



**CSA B651 OBC** ADA

# Codes/Standards

ASME A112.18.1/CSA B125.1 ASSE 1037/ASME A112.1037/CSA B125.37 ADA ICC/ANSI A117.1 CSA B651 OBC

# **KOHLER® One-Year Limited** Warranty

See website for detailed warranty information.

# Available Colors/Finishes

Color tiles intended for reference only.

**Color Code Description** 


CP Polished Chrome



# Mach™ Tripoint™

**KOHLER** Faucets Touchless retrofit toilet flushometer, DC-powered, 1.28 gpf

K-10TD00N10-RF

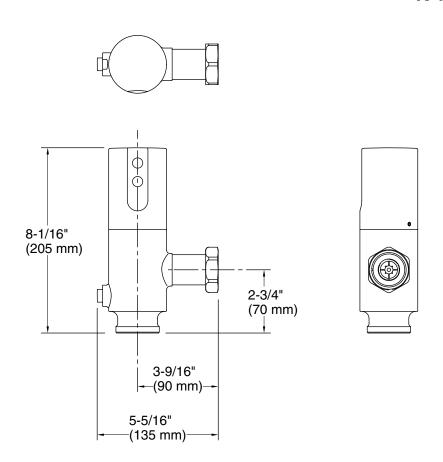

#### **Technical Information**

All product dimensions are nominal.

Battery - DC, included Power source:

## **Pressure/fixture Supply Requirements**

Fixture pressure 80 psi (551.6 kPa)

max (static):

Fixture pressure min 35 psi (241.3 kPa)

(static):

Min flowing 25 psi (172.4 kPa)

pressure:

25 gpm (94.6 lpm) Min flow rate:

#### **Notes**

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

For ADA installations, rear grab bar may need to be split or shifted.

