

# BG-CHA

**1080P Full HD USB 3.1 Video Capture Device with Scaler and Audio  
Embedding**

## User Manual







## TABLE OF CONTENTS

Statement	4
Safety Precautions	4
Introduction	5
Features	5
Packing List	5
Technical Specifications	6
Operation Controls and Functions	7
Video Streaming	7
Stream and record videos with OBS	11
Tech Support	16
Warranty	16
Mission Statement	16
Copyright	16



## Statement

---

Please read these instructions carefully before connecting, operating, or configuring this product. Please save this manual for future reference.

## Safety Precautions

---

- To prevent damaging this product, avoid heavy pressure, strong vibration, or immersion during transportation, storage, and installation.
- The housing of this product is made of organic materials. Do not expose to any liquid, gas, or solids which may corrode the shell.
- Do not expose the product to rain or moisture.
- To prevent the risk of electric shock, do not open the case. Installation and maintenance should only be carried out by qualified technicians.
- Do not use the product beyond the specified temperature, humidity, or power supply specifications.
- This product does not contain parts that can be maintained or repaired by users. Damage caused by dismantling the product without authorization from BZBGear is not covered under the warranty policy.
- Installation and use of this product must strictly comply with local electrical safety standards.
- Disconnect power cord by connector only. Do not pull on the cable portion.
- Do not place or drop heavy or sharp-edged objects on the power cord. A damaged cord can cause fire or electrical shock hazards. Regularly check power cord for excessive wear or damage to avoid possible fire / electrical hazards.
- Ensure the unit is always properly grounded to prevent electrical shock hazard.
- Do not operate units in hazardous or potentially explosive atmospheres. Doing so could result in fire, explosion, or other dangerous results.
- Handle with care to avoid shocks in transit. Shocks may cause malfunction. When you need to transport the unit, use the original packing materials, or alternate adequate packing.
- Turn off the unit if an abnormality or malfunction occurs. Disconnect everything before moving the unit.

**Note:** due to constant efforts to improve products and product features, specifications may change without notice.



## Introduction

---

The BG-CHA is a USB 3.1 full HD video capture device with scaler and audio embedding that allows for capture of HDMI video signals. It utilizes a USB 3.1 interface to achieve high speed data transmission to capture and display original uncompressed 1080p60 signals with realistic colors.

BG-CHA also uses large volume image buffer technology to effectively eliminate video tearing. The high sampling rate and sampling accuracy assure images have a crisp sharpness and rich detail allowing for high quality captures.

## Features

---

- HDMI output resolution scaler with audio embedding
  - HDMI video and audio streams over USB 3.1
  - UVC 1.0
  - Input and output video resolution up to 1080p 60Hz
  - Auto-detection of video format to ensure plug-play operations
  - Recording Video Format: H.264 (Software Compression)
  - Works on multiple operating system platforms
  - Compatible with most 3rd party software such as OBS Studio, Stream Labs, AMCap
  - USB 3.1 (MJPEG/YUY2) and USB 2.0 (MJPEG)
  - Low Latency
1. Video quality is affected by the capability of computer and software settings.
  2. Use the included USB 3.1 cable in the box to help avoid compatible issues.

## Packing List

---

- 1x BG-CHA USB 3.1 Full HD Video Capture Device
- 1x User Manual
- 1x USB 3.1 Gen 1 A to A Cable (host to device)
- 1x Quick Start Guide




## Technical Specifications

Technical	
Max. Data Rate	350 Mbps
UAC Video Output Resolution	UHD Video Standards: 1080p at 60/50/30/25/24 Hz HD Video Standards: 720p at 60/50/30/25/24 Hz 1080p at 23.98/24/25/29.97/30 Hz VESA Standards: 1280x1024p at 60/50/30/25/24 Hz 1280x720p at 60/50/30/25/24 Hz 1024x768p at 60/50/30/25/24 Hz 600p at 60/50/30/25/24 Hz 480p at 60/50/30/25/24 Hz
UAC Audio Output Format	Stereo / 16-bit / 48000Hz
Recording Video Format	YUY2 (USB3.1 Gen 1), MJPG (USB2.0/3.1 Gen 1)
Audio Input	HDMI Embedded Audio 3.5mm Analog Stereo Audio
Operating System Compatibility	Windows 7, 8, 10, Mac OS X 10.9 or above, Linux
3rd-Party Software Compatibility	OBS Studio (Windows, Linux)/ AMCap (Windows) Potplayer (Windows)/ Skype (Windows, OS X) Hangout (Windows)/ TeamViewer (Windows)
Hardware Requirements	Desktop: Intel Core i5-3400+NVIDIA GTX660 or higher Notebook: Intel Core i7-4810MQ+NVIDIA GTX870M+4GB RAM or higher
ESD Protection	8 KV - Contact Discharge 15KV - Air Discharge
Mechanical	
Housing Design	Aluminum
Casing Style	Portable
Power Connection	Micro-USB Port
Power Supply	5V DC, 1A
Power Consumption	4 watts (Max)
Operating Humidity	20-90% RH (no condensation)
Operation temperature	32~104°F / 0~40°C
Product Weight	0.3 lbs [135g]
Package Weight	0.6 lbs [270g]
Certifications	CE, FCC, RoHS



## Operation Controls and Functions

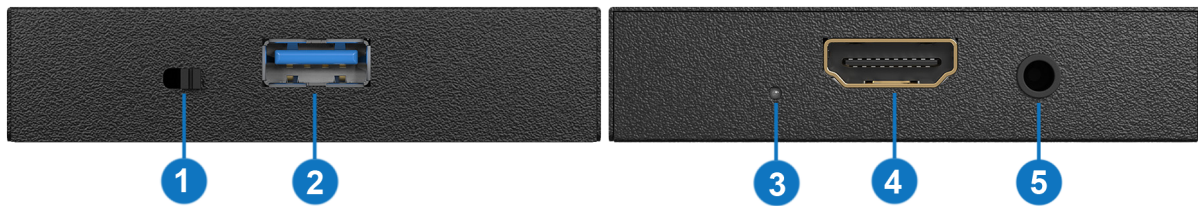

1. **AUDIO SWITCH:** [left] Audio from stereo audio in, [right] Audio from HDMI
2. **USB OUT:** Connect to a USB host (PC, NB, MAC...)
3. **LED INDICATOR:** Input signal indicator LED
4. **HDMI IN:** Connect to a HDMI source
5. **STEREO AUDIO IN:** Connect to analog stereo audio source


## Video Streaming

### Create a Video Stream

Users can create video streams on their streaming service platform of choice. The below steps show how to complete the video streaming settings from Twitch and YouTube.

#### Twitch

1. Browse the Twitch website (<https://www.twitch.tv/>) and log in, then select "**Creator Dashboard**" from your account drop-down menu at the top right of the screen.

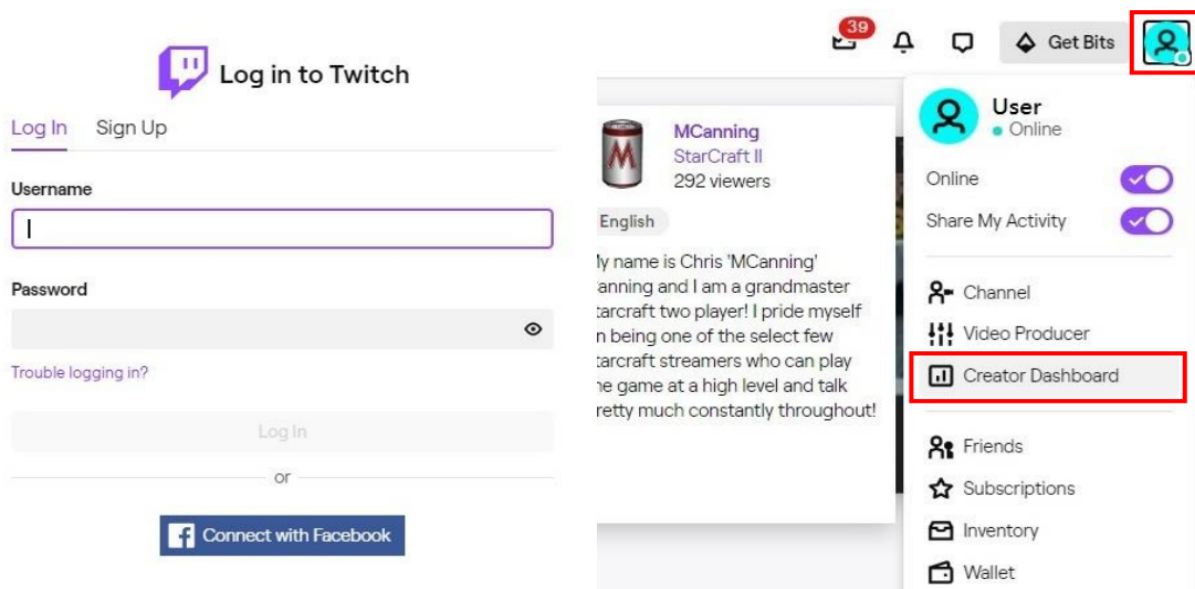


2. Find "**Preferences**" in the left menu, and click "**Channel**", then you will see "**Primary Steam key**" on the screen. Copy the "**Primary Steam key**" and paste it




into the "Stream Key" field in the OBS, then click "Start Streaming" in the software.


\* Please refer to steps 4-6 of the OBS software control program.

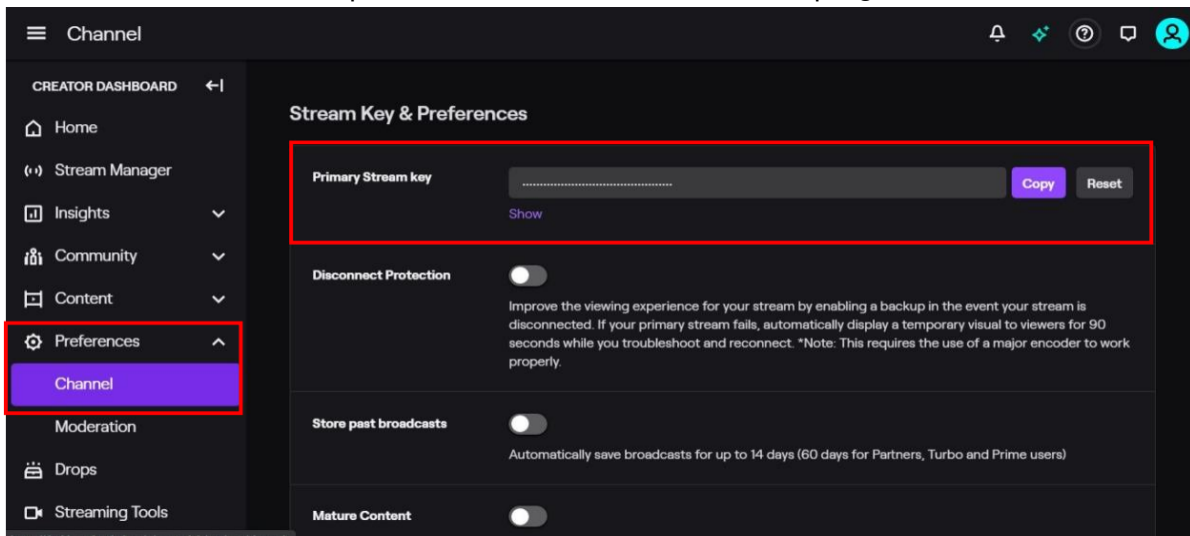

3. Go back to Twitch and select "Channel" from your account drop-down menu.

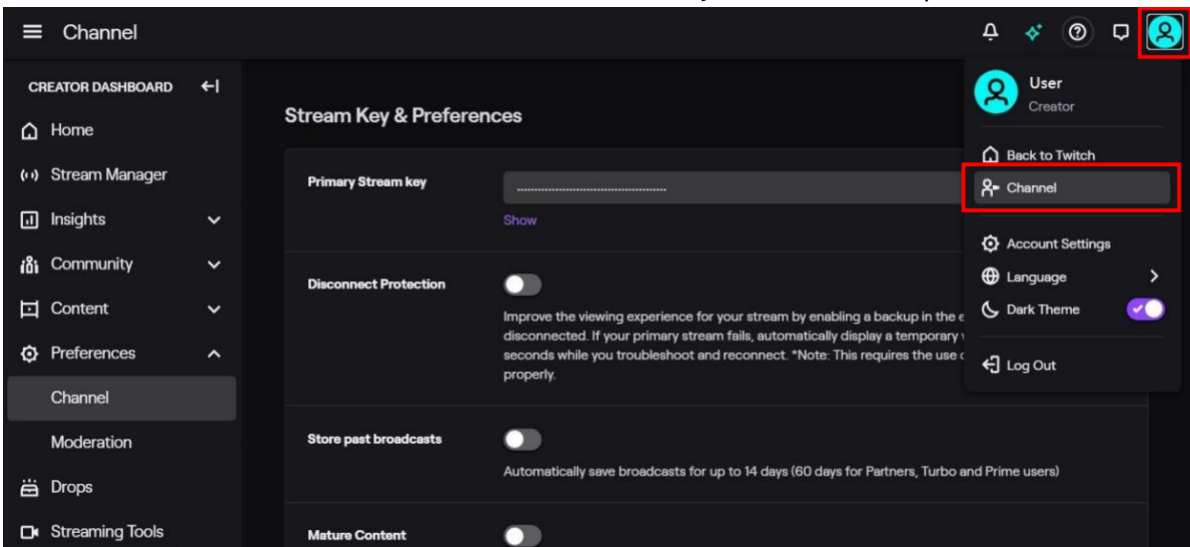

4. At this point, you will see the player start live streaming.

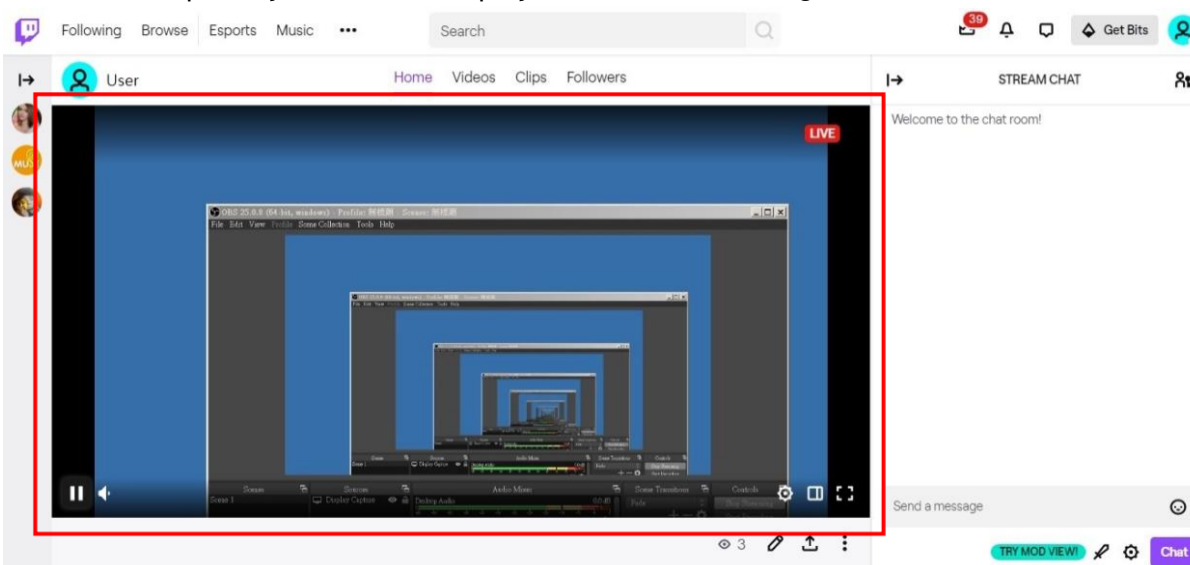







## YouTube

1. Browse the YouTube website (<https://www.youtube.com/>) and log in, then click "**Go live**" from the "**Create**" icon menu at the top right of the screen.

\* If your account is using YouTube for the first time to create a video stream, you need to wait 24 hours to enable the function.

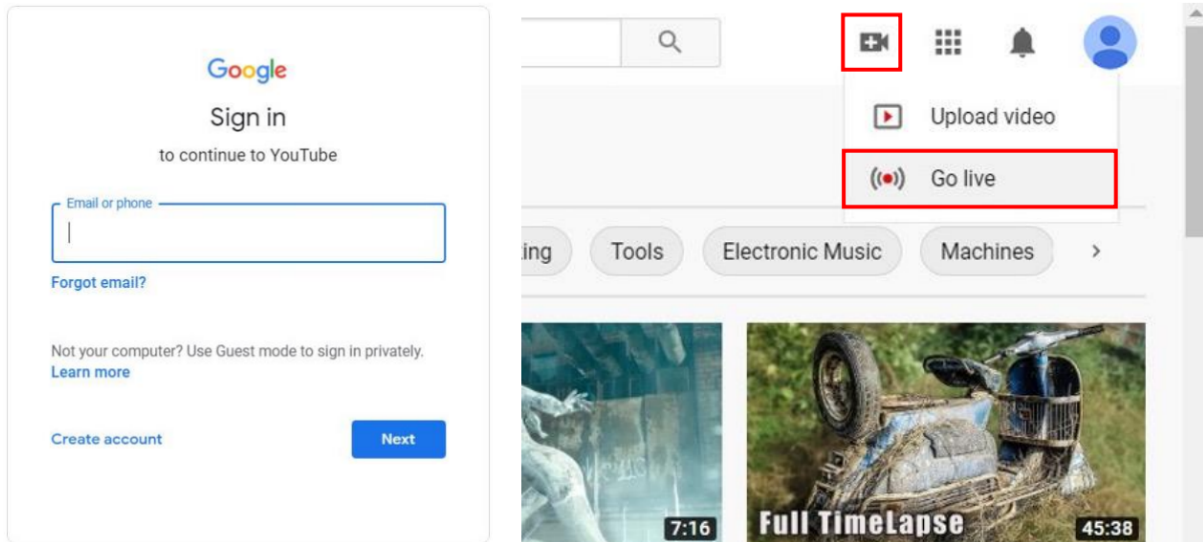


2. Click "**Stream**" in the left menu, and fill in the relevant information of the live video to create a new stream.

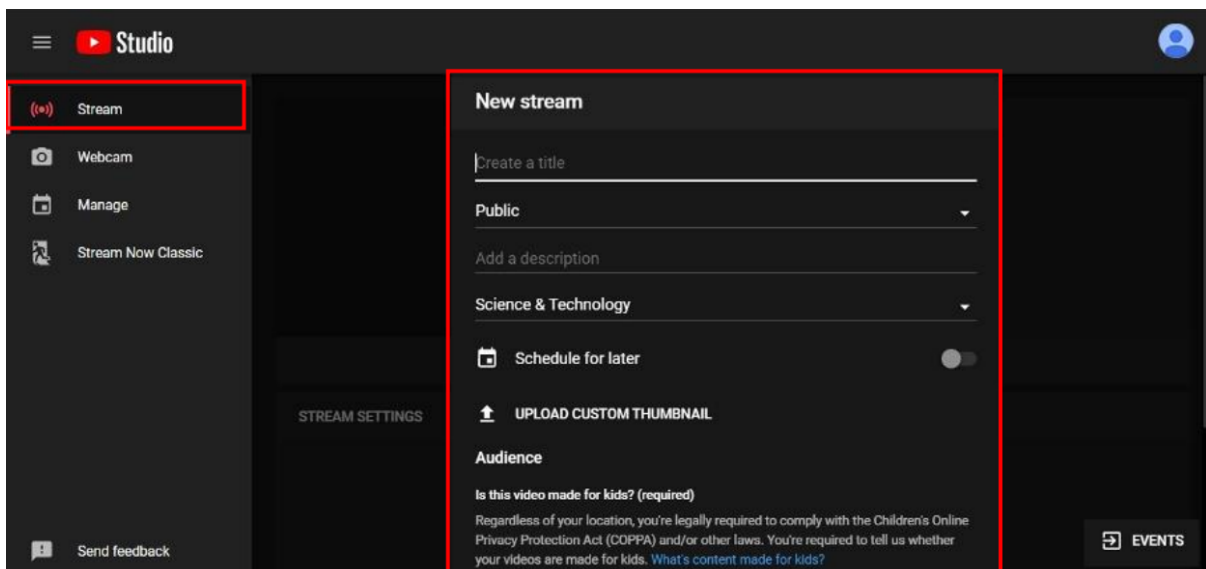


3. You will see "**Stream key**" from the "**STREAM SETTINGS**" below. Copy the "**Stream key**" and paste it into the "**Stream Key**" field in the OBS, then click "**Start Streaming**" in the software.


\* Please refer to steps 4-6 of the OBS software control program.

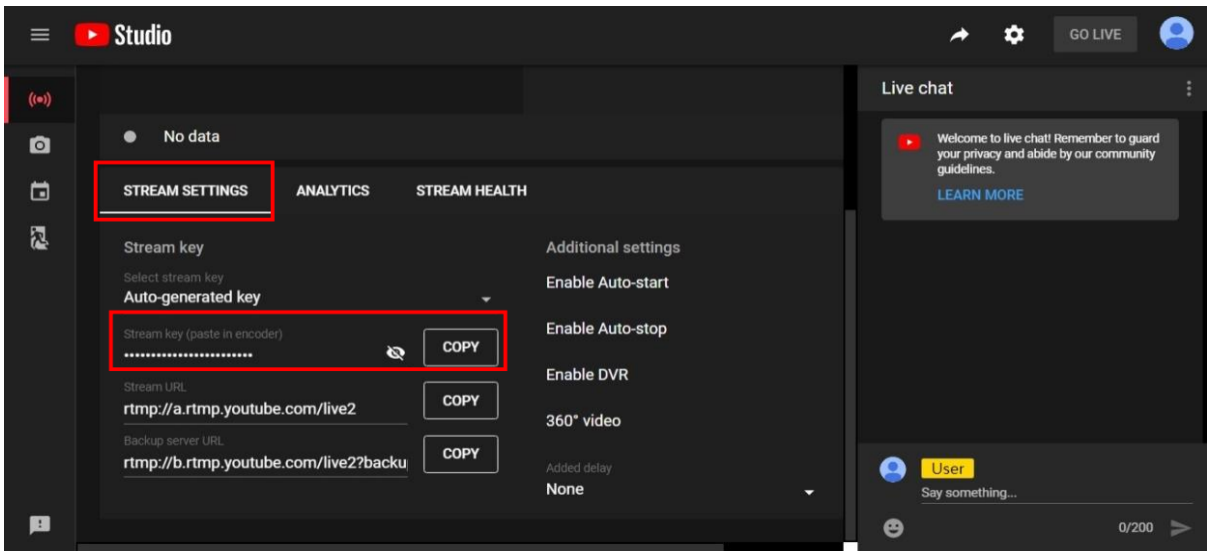

- Next, go back to YouTube, and then wait for 30-60 seconds, the player will display the live preview. At the same time, the "GO LIVE" button at the top right will turn blue, please press this button.

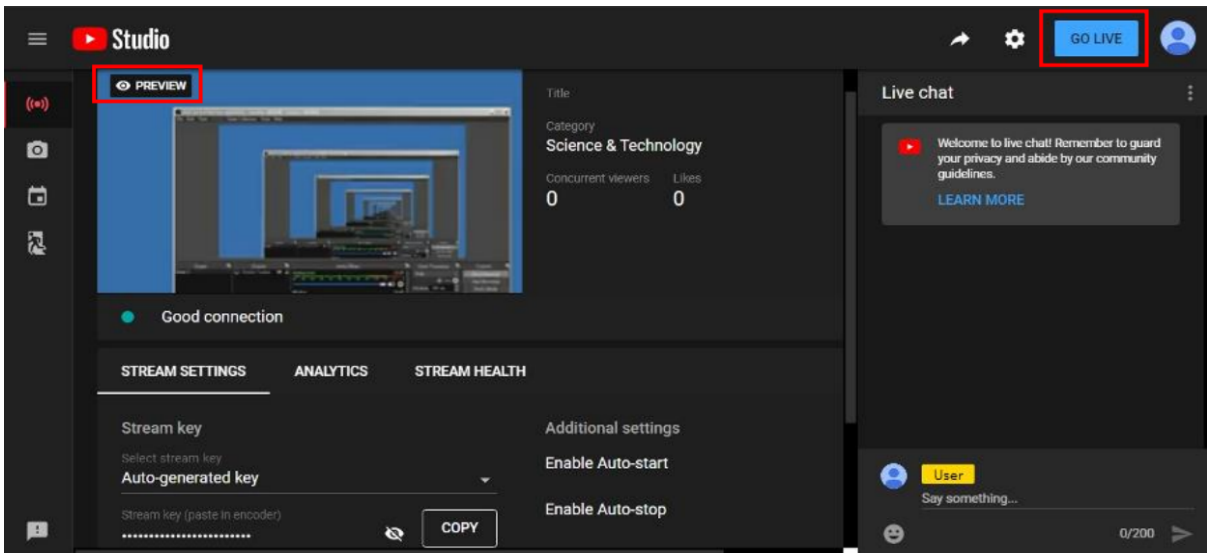

- The player on YouTube will start live streaming.

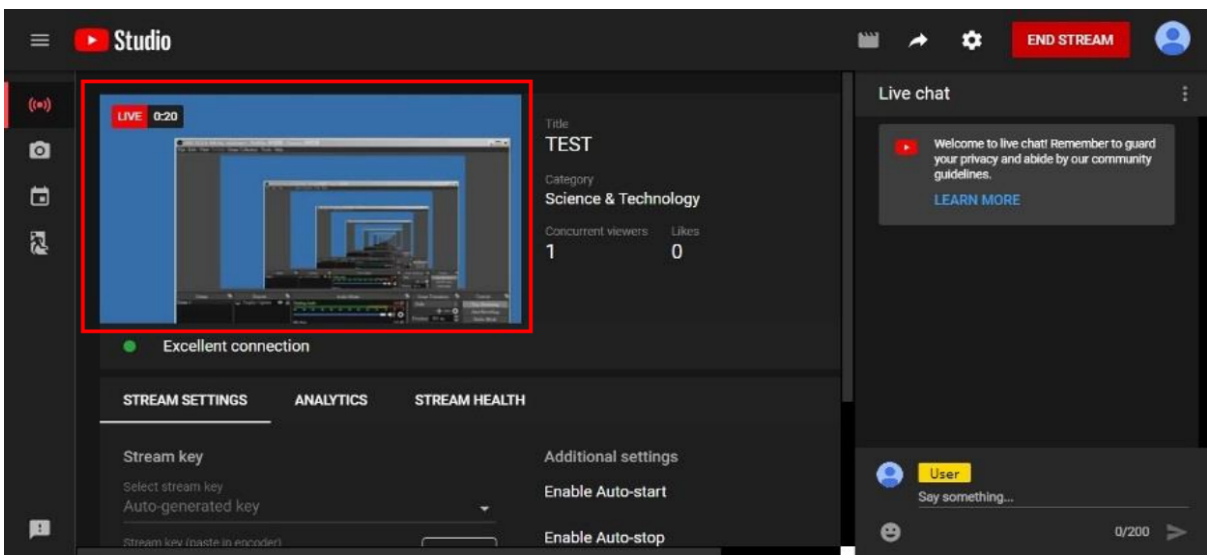



## Stream and record videos with OBS

OBS is a popular USB capture freeware and has excellent compatibility. Please start with OBS if users are not familiar with USB capture devices.


### Download the software

Browse the download page of the OBS official website (<https://obsproject.com/download>), then select the suitable computer operating system and start downloading.




### Start the software control program

After downloading the software, please open it and follow the below steps to complete the video streaming settings.

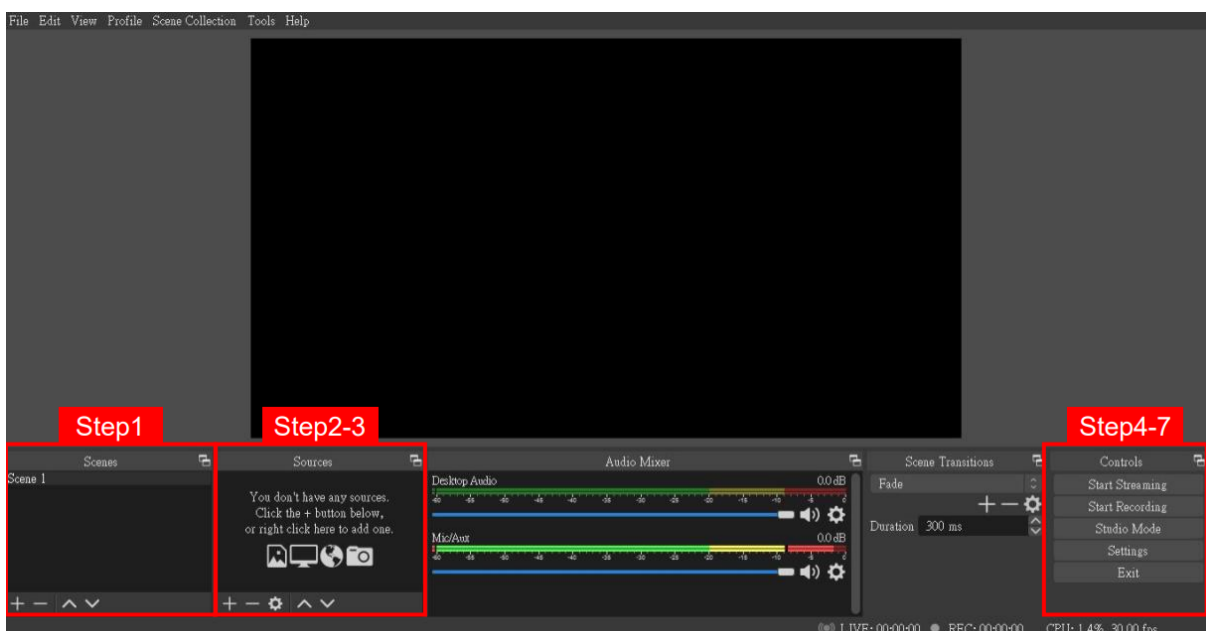





1. First, find the "Scenes" window, click "+" in the lower left corner, and then enter the name of the scene to create a new scene.

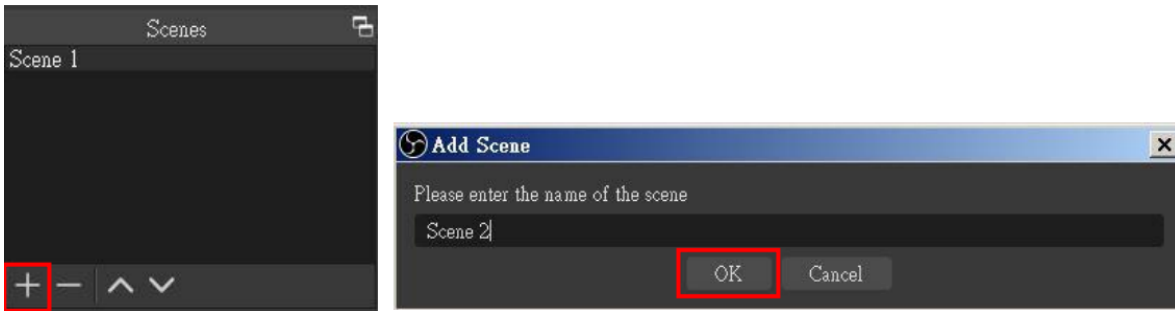

2. Find the "Source" window, click "+" in the lower left corner, and then select "Display Capture" or "Video Capture Device" to create a new source.

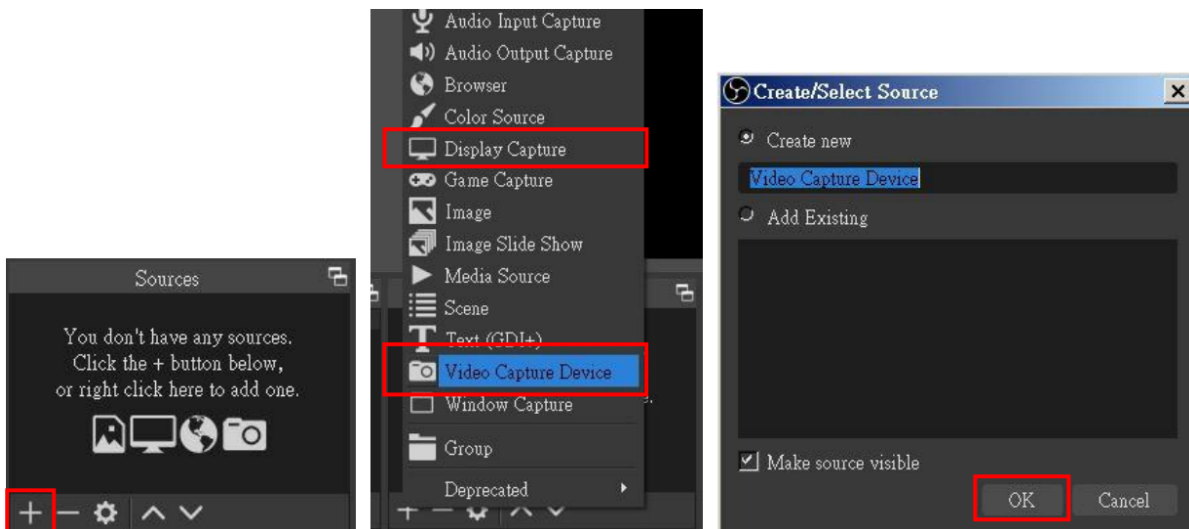


3. Next, you can set display capture properties. If you select "Display Capture" in step 2, you can select the primary monitor or other extended monitor as the display source. If you select "Video Capture Device" in step 2, you can select USB video device as the display source. After all settings are completed, click "OK".

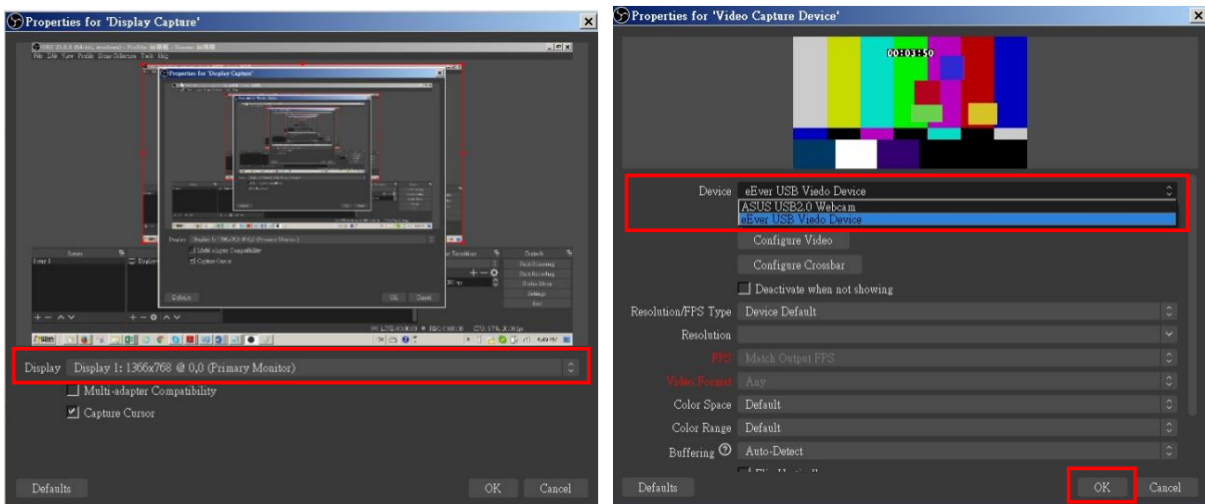



- Click "**Settings**" and then select "**Stream**" to perform streaming settings. Users can choose service providers, including Twitch, YouTube, etc.

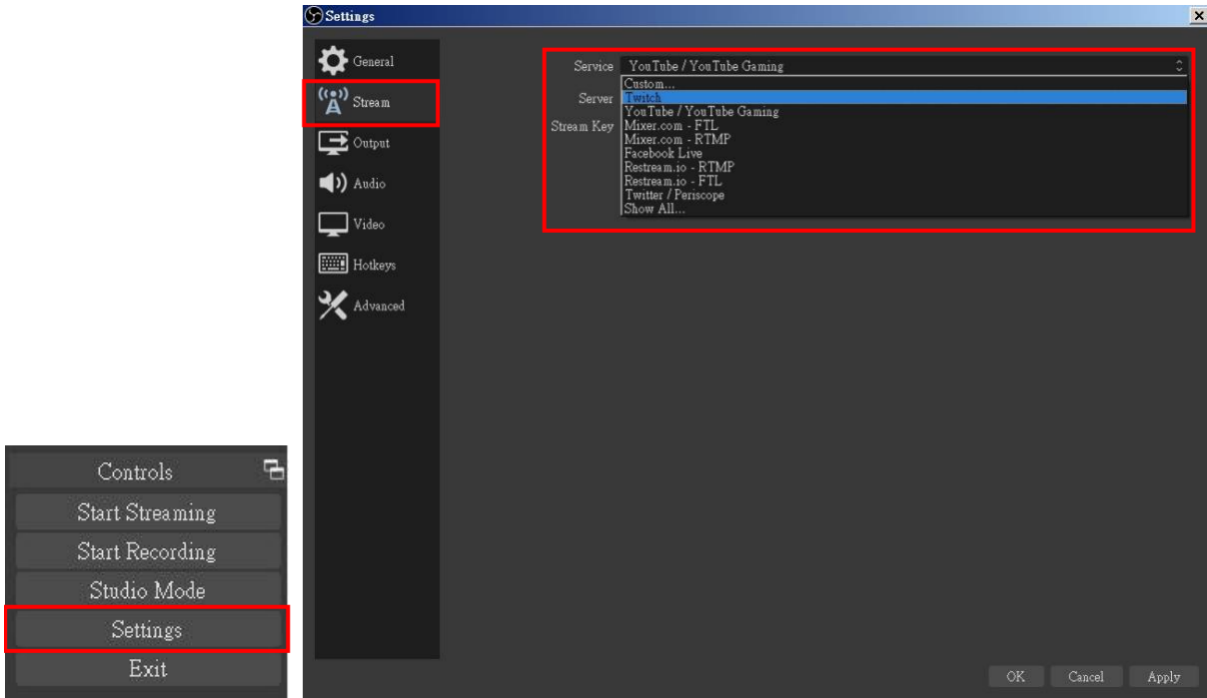


- Paste the stream key provided by the service provider into the "**Stream Key**" field, then click "**Apply**" and "**OK**" after setting. In addition, users can click "**Get Stream Key**" at this step to open the service provider website.



- Please click "**Start Streaming**". At this time, the screen after clicking "**Start Streaming**" will be displayed in the live video.



- On the other hand, users can also click "**Start Recording**" to record videos with OBS. Besides, you can click "**Settings**" and then select "**Output**" to set "**Recording Path**" and "**Recording Format**".

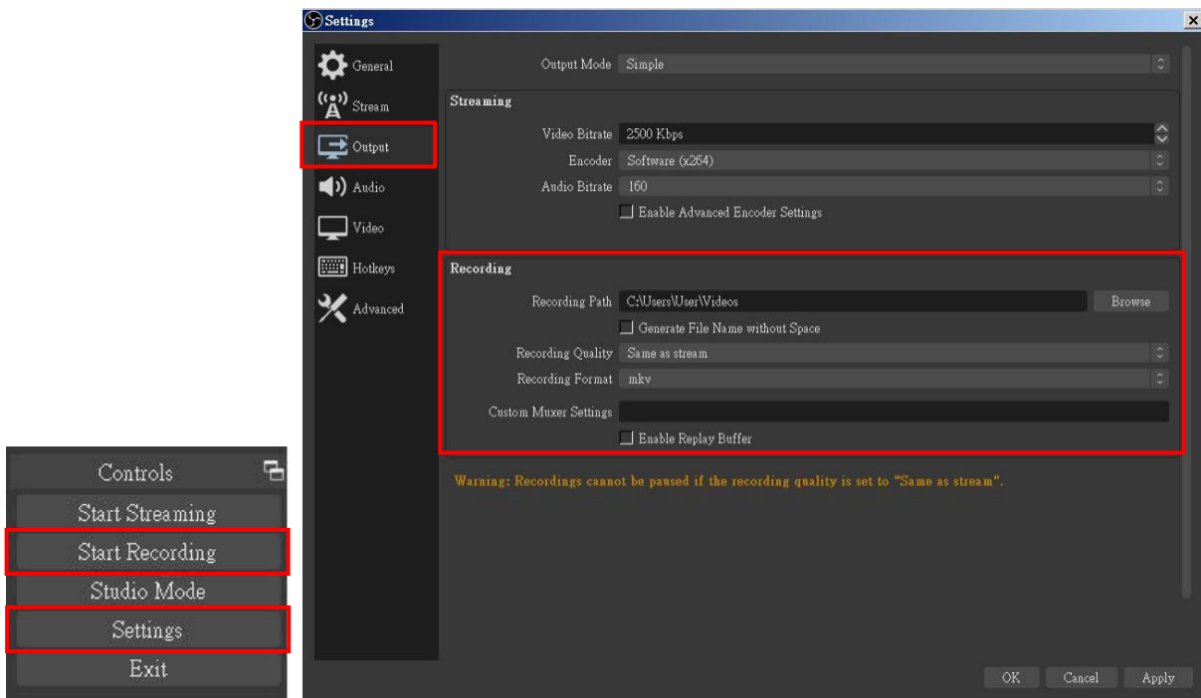

**Note:** The procedures the manual demonstrates are based on the interface that each website provides at the time when the manual is written. The most current method of live streaming should be similar to the above procedures but is subject to change by the website interface update by the social media platform.

## Troubleshooting

Our USB device has been subjected to rigorous tests before shipping. Most of the incompatibilities we have experienced are not from the USB capture device itself, but from the sophisticated software and hardware combinations of PCs or laptops. Please try the following suggestions

1. OBS is a popular USB capture freeware and has excellent compatibility with most devices. Please download it and start with OBS if users are not familiar with USB capture devices.

<https://obsproject.com/download>

2. Due to the complexities of OS and computer hardware, different USB ports on PCs or laptops may have different performance or limitations. Please try all USB ports to see if there are any differences.

3. Please use the included USB cable. We do not guarantee the overall performance when the USB capture box is connected with other USB cables.

4. SDI cable quality may also play an essential role when capturing. Please be sure the SDI cable is capable of 1080P@60 SDI signal transmission or better. Try different cables when the device is not able to work as expected.

5. If audio has noise, please adjust sampling frequency setting on PC or laptop. If the default sampling rate is 48000 Hz, please select 44100 Hz and vice versa. The path of setting sampling frequency on windows 10 is:

**Start → Setting → System → Sound → Device properties → Additional device properties → Advanced**



## Usb Pin Definition



	P1		P2
VBUS	1	↔	1
D-	2	↔	2
D+	3	↔	3
GND	4	↔	4
SSRX-	5	↔	5
SSRX+	6	↔	6
GND	7	↔	7
SSTX-	8	↔	8
SSRX+	9	↔	9
Shield	SHELL	↔	SHELL

## Application Example





## Tech Support

---

Have technical questions? We may have answered them already!

Please visit BZBGear's support page ([bzbgear.com/support](http://bzbgear.com/support)) for helpful information and tips regarding our products. Here you will find our Knowledge Base ([bzbgear.com/knowledge-base](http://bzbgear.com/knowledge-base)) with detailed tutorials, quick start guides, and step-by-step troubleshooting instructions. Or explore our YouTube channel, BZB TV ([youtube.com/c/BZBTVchannel](http://youtube.com/c/BZBTVchannel)), for help setting up, configuring, and other helpful how-to videos about our gear.

Need more in-depth support? Connect with one of our technical specialists directly:

<u>Phone</u>	<u>Email</u>	<u>Live Chat</u>
1.888.499.9906	<a href="mailto:support@bzbgear.com">support@bzbgear.com</a>	<a href="http://bzbgear.com">bzbgear.com</a>

## Warranty

---

BZBGear Pro AV products and cameras come with a three-year warranty. An extended two-year warranty is available for our cameras upon registration for a total of five years.

For complete warranty information, please visit [bzbgear.com/warranty](http://bzbgear.com/warranty).

For questions, please call 1.888.499.9906 or email [support@bzbgear.com](mailto:support@bzbgear.com).

## Mission Statement

---

BZBGear is a breakthrough manufacturer of high-quality, innovative audiovisual equipment ranging from AVoIP, professional broadcasting, conferencing, home theater, to live streaming solutions. We pride ourselves on unparalleled customer support and services. Our team offers system design consultation, and highly reviewed technical support for all the products in our catalog. BZBGear delivers quality products designed with users in mind.

## Copyright

---

All the contents in this manual and its copyright are owned by BZBGear. No one is allowed to imitate, copy, or translate this manual without BZBGear's permission. This manual contains no guarantee, standpoint expression or other implies in any form. Product specification and information in this manual is for reference only and subject to change without notice.

**All rights reserved.** No reproducing is allowed without acknowledgement.