

AirPro Universal -use with any indoor fan with 1/8" IPS light kit adapter • Wet Location Listed



Description:

Brighten up the room by equipping your fan with a two-light indoor/outdoor Low Profile fan kit. Universal styling lets you easily transition into this brand new look. Quick connect wiring is available to make the installation simple and easy. Includes two 3000K, 800 lumen each (source), Title 24 certified LED bulbs. Antique Bronze Finish.

Specifications:

- Opal glass Diffuser
- White shallow opal glass closure
- Antique Bronze finish.
- Two-light indoor/outdoor low profile ceiling fan light kit
- For use with Progress Lighting P2500, P2501 and P2502 ceiling fans
- Wet location listed so it can be used indoor or outdoor
- Universal style for use with any indoor/outdoor fans that accept an accessory light
- Includes two 3000K, 800 lumen each (source), Title 24 certified LED bulbs
- Energy Star Qualified
- Meets California T24 JA8-2016.
- Fully dimmable with dimmable bulbs.
- 6 in of wire supplied

Performance:

Number of Lamps	2
Input Power	9 W
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	800/88 (LM-82)
CCT	3000 K
CRI	90 CRI
Life (hours)	25000 (L70/TM-21)
EMI/RFI	Title 24
Max. Operating Temp	40 °C
Warranty	1-year Limited Warranty
Labels	UL Wet Location Listed
	ENERGY STAR® qualified
	Meets California Title 24 JA8-2016


P2611-20WB



Dimensions:

Diameter: 10-1/2 in
Height: 3-13/16 in

Opal glass Diffuser
Width: 10-9/16 in
Height: 3-1/4 in

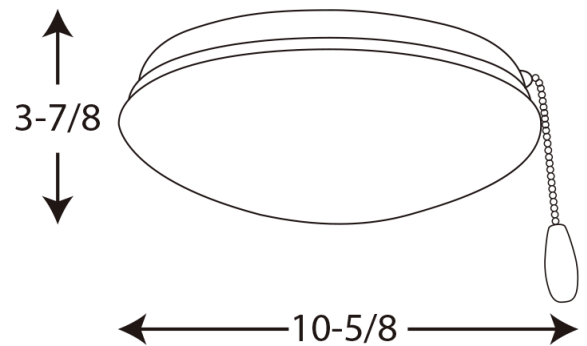



Dimming Notes:

P2611-20WB is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls:

Lutron_Diva DVELV-300P

Lutron_Nova T NTELV-300

Lutron_Maestro MAELV-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.

P2611-20WB