




Terminals & Splices > Quick Disconnects

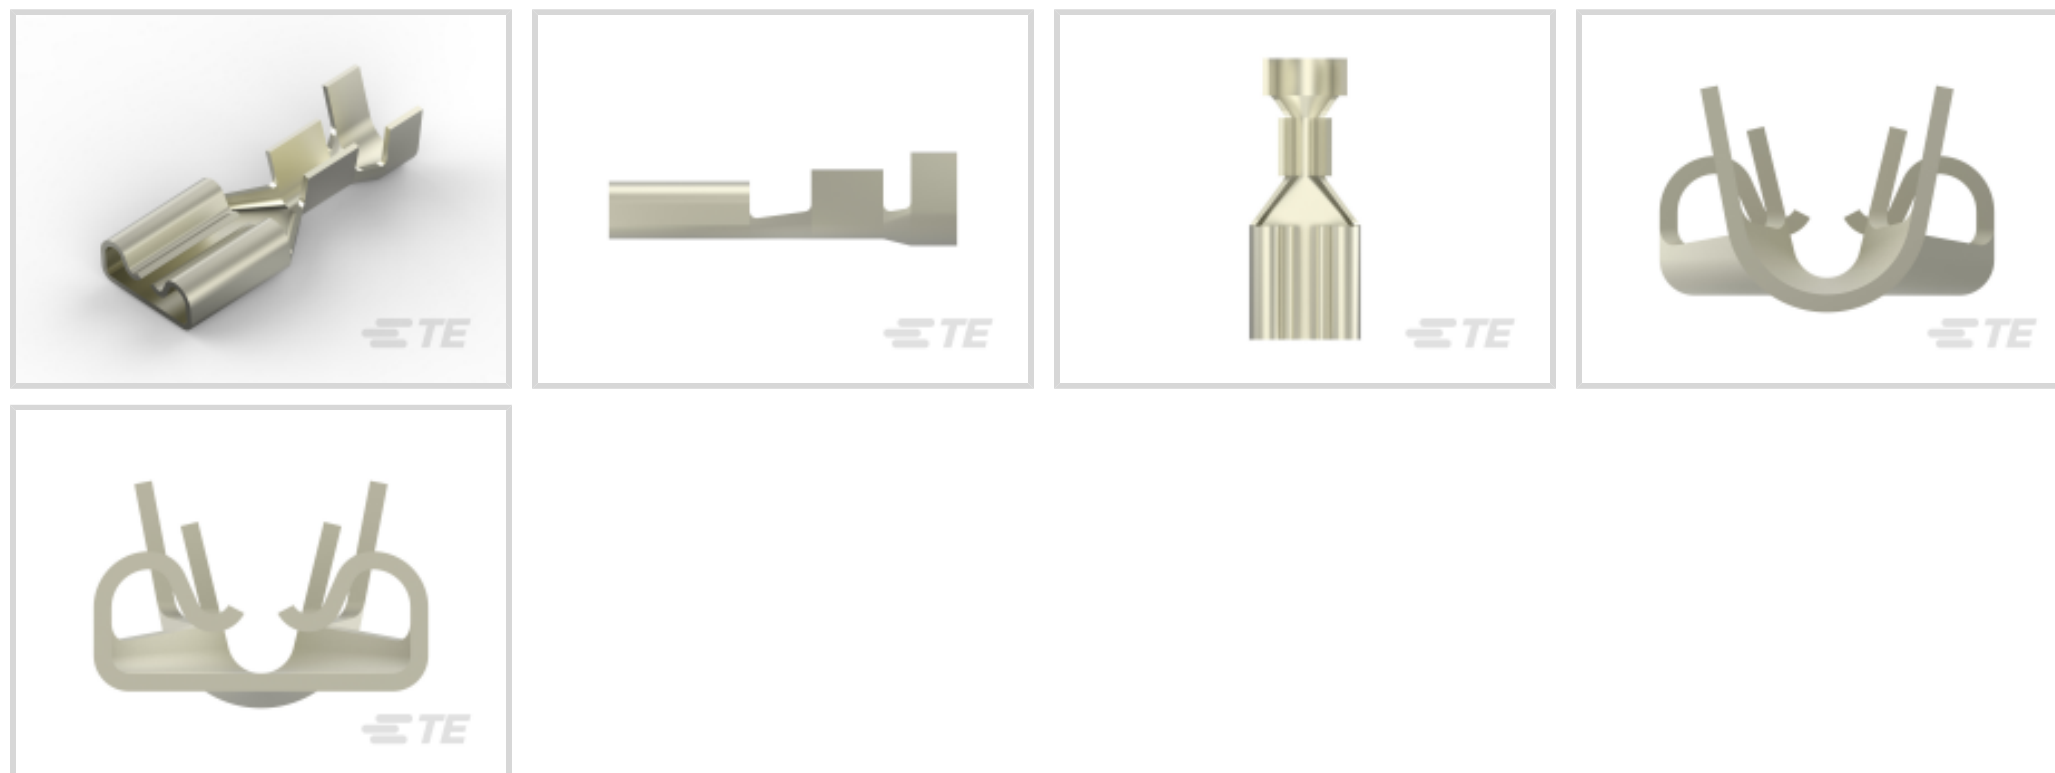

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.82 – 2.08 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Product Type Features

Terminates To	Wire & Cable
Wire/Cable Type	Regular Wire
Wire Stop	No
Insertion Force	Low
Sealable	No

Configuration Features

Connection Capacity	Single
---------------------	--------

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Steel
Terminal Plating Material	Nickel
Crimp Type	F-Crimp



Barrel Type	Open
-------------	------

Mechanical Attachment

Mating Retention Type	Dimple
-----------------------	--------

Wire Insulation Support	With
-------------------------	------

Dimensions

Accepts Wire Insulation Diameter Range	3.1 – 4.3 mm [.12 – .17 in]
--	-----------------------------

Receptacle Terminal Stock Thickness	.46 mm [.018 in]
-------------------------------------	------------------

Overall Length	19.2 mm [.753 in]
----------------	-------------------

Wire Size	.82 – 2.08 mm ²
-----------	----------------------------

Usage Conditions

Insulation Option	Uninsulated
-------------------	-------------

Operating Temperature Range	-40 – 250 °C [-40 – 482 °F]
-----------------------------	-----------------------------

Industry Standards

RU (UL Component Program)	Recognized
---------------------------	------------

UL File Number	E66717 (Recognized)
----------------	---------------------

CSA Certified	No
---------------	----

UL Rating	Recognized
-----------	------------

Packaging Features

Packaging Quantity	10000
--------------------	-------

Packaging Method	Strip/Reel
------------------	------------

Other

Line	FASTON .250
------	-------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
--	---



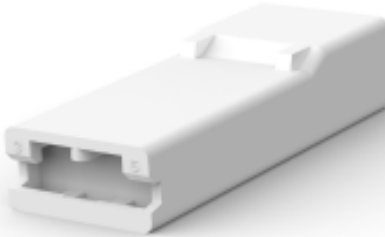

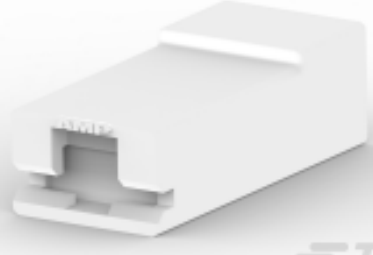

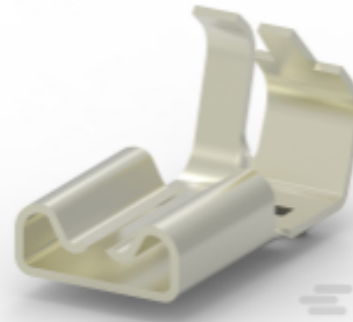

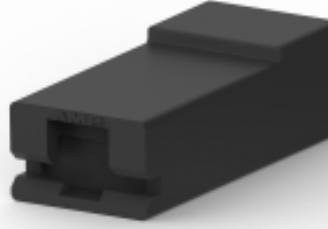
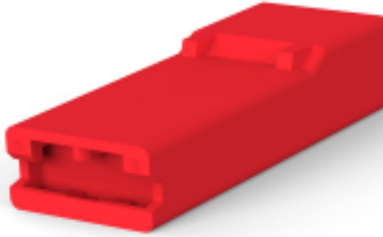
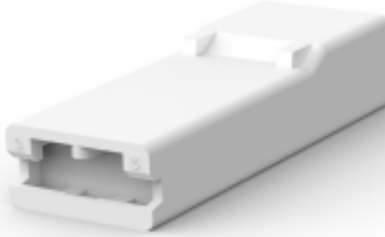
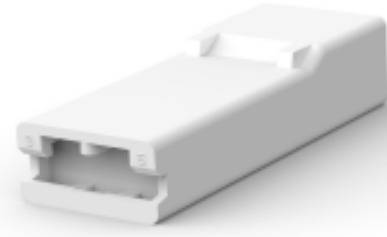



Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer






This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

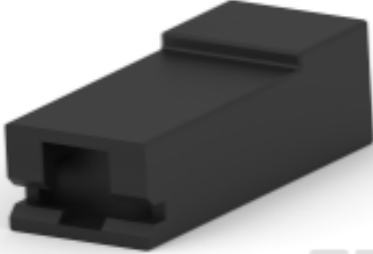 <p>TE Part # 1969632-1 250 FASTON HSG.,REC.,1 POS,BLACK</p>	 <p>TE Part # 58524-1 PROCRIPPER TOOL & DIE</p>	 <p>TE Part # 2-735075-6 250 FASTON INS POST.,REC.,1 POS, NATRUAL</p>	 <p>TE Part # 735075-5 250 FASTON HSG. REC. 1P BLACK</p>
 <p>TE Part # 1-480416-8 250 FASTON HSG.,REC.,1 POS, NATRUAL</p>	 <p>TE Part # 1-735075-5 250 FASTON INS POST.,REC.,1 POS, BLACK</p>	 <p>TE Part # 2238142-1 250 FASTON,FLAG,REC.,22-16 AWG, NPST</p>	 <p>TE Part # 480416-2 250 FASTON HSG. REC 1P BLACK</p>
 <p>TE Part # 1-480416-1 FASTON 250 REC HSG 1CIR NYLON BLK</p>	 <p>TE Part # 1-735075-1 250 FASTON INS POST.,REC.,1 POS, RED</p>	 <p>TE Part # 735075 250 FASTON HSG. REC. 1P CLEAR</p>	 <p>TE Part # 1-735075-0 250 FASTON INS POST,REC.,1 POS</p>

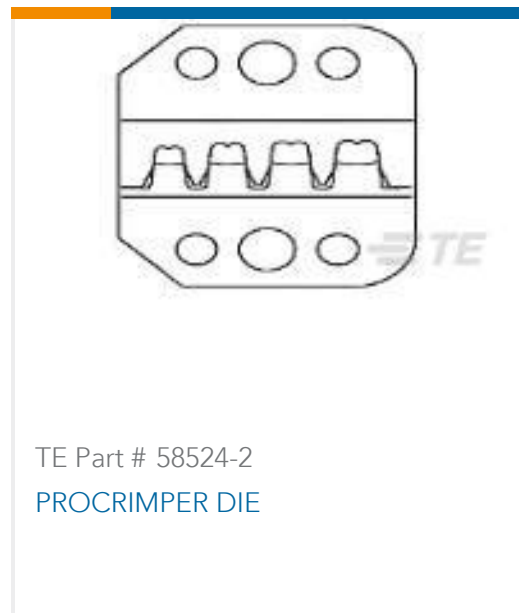

Also in the Series | **FASTON 250**

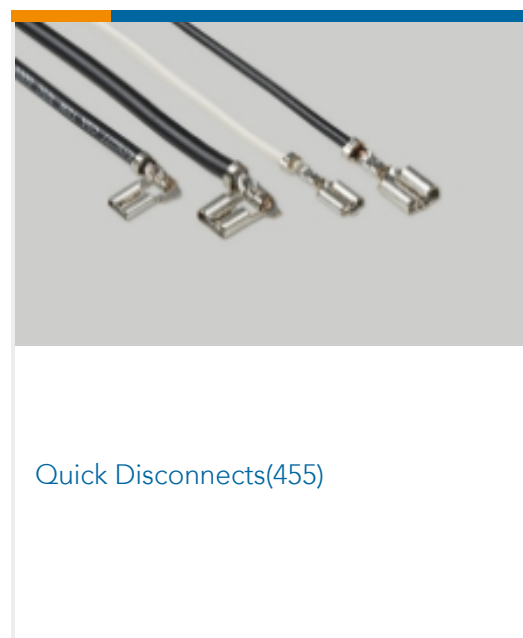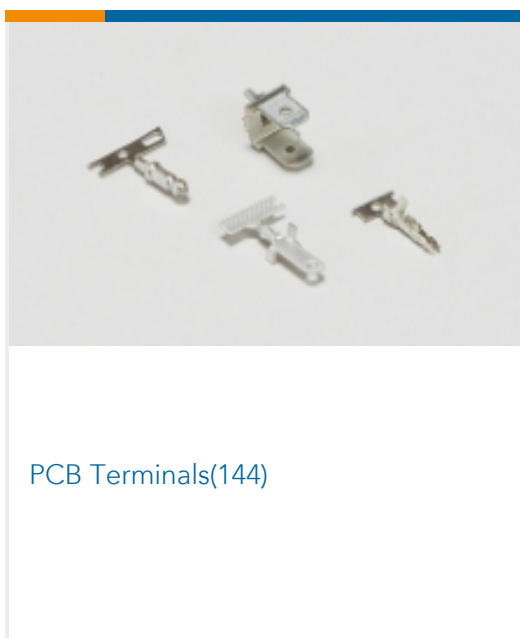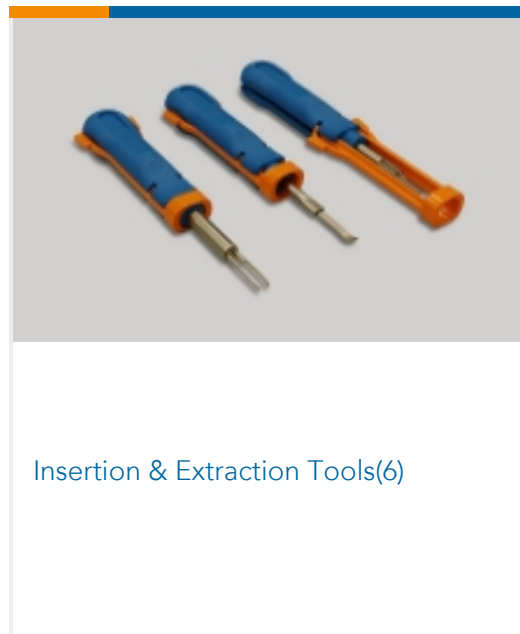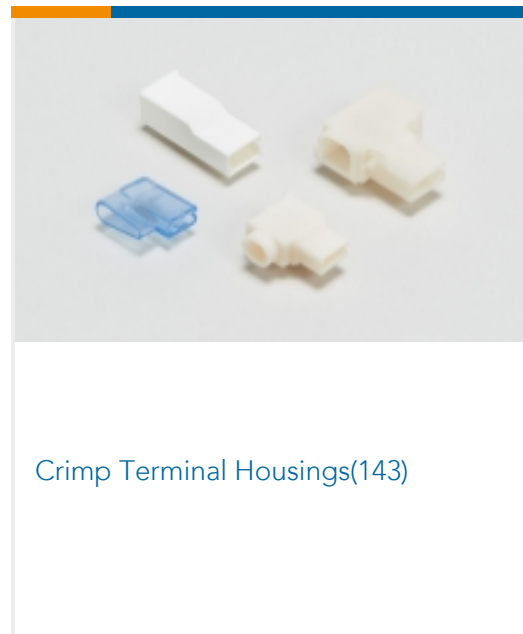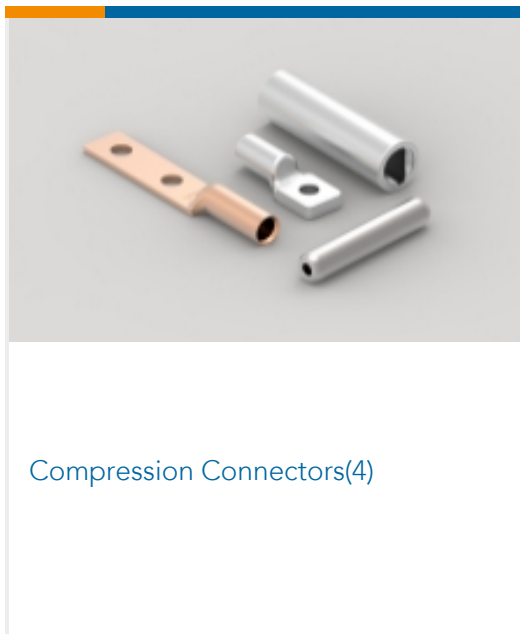

Documents

Product Drawings

250 FASTON,REC.,18-14 AWG,NPST

English

CAD Files

Customer View Model

ENG_CVM_CVM_1742198-1_H.2d_dxf.zip

English



3D PDF

3D

Customer View Model

[ENG_CVM_CVM_1742198-1_H.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1742198-1_H.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[82004 FASTON Terminals \(Insulated and Uninsulated\) Catalog - FASTON Receptacles Section](#)

English

[1-1773948-2 Standard Line FASTON Receptacles QRG](#)

English

[Introductory Flyer - Low Insertion Force FASTON Terminals](#)

English

Product Specifications

[Application Specification](#)

English

Product Environmental Compliance

[TE Material Declaration](#)

English

Agency Approvals

[Agency Approval Document](#)

English