TE Internal #: 1-1565359-1


PCB Mount Header, Vertical, Board-to-Board, 100 Position, .5 mm [.

02 in] Centerline, Gold, Surface Mount, Signal, Black

View on TE.com >



Connectors > PCB Connectors > PCB Headers & Receptacles

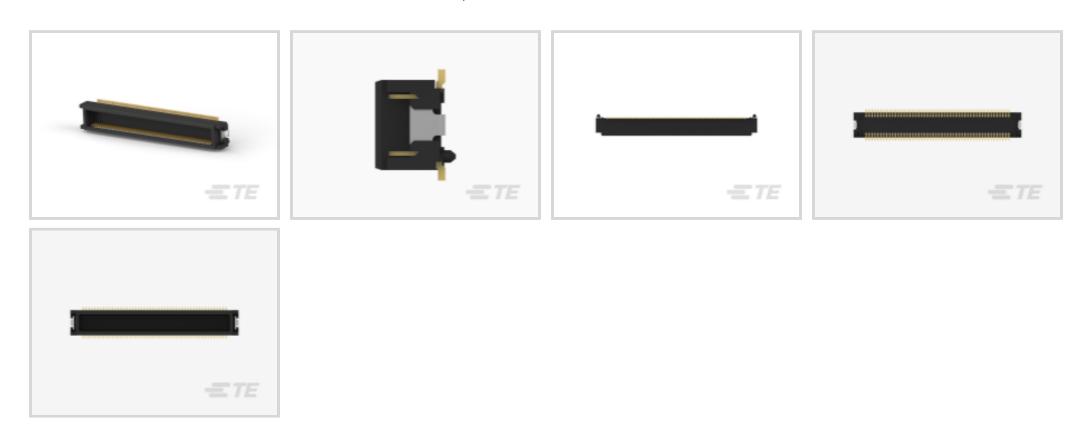

PCB Connector Assembly Type: PCB Mount Header

PCB Mount Orientation: Vertical
Connector System: Board-to-Board

Number of Positions: 100

Centerline (Pitch): .5 mm [.02 in]

Features

Product Type Features

PCB Connector Assembly Type	PCB Mount Header
Connector System	Board-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Stackable	Yes
PCB Mount Orientation	Vertical
Number of Positions	100
Board-to-Board Configuration	Parallel
Electrical Characteristics	
Dielectric Withstanding Voltage (Max)	500 VAC
Insulation Resistance	2 ΜΩ
Operating Voltage	250 VAC
Body Features	

Black

Primary Product Color



Contact Features

Contact Layout	Inline
PCB Contact Termination Area Plating Material Thickness	.05 – .127 μm[2 – 5 μin]
Mating Tab Width	.4 mm[.016 in]
Mating Tab Thickness	.2 mm[.008 in]
PCB Contact Termination Area Plating Material	Gold
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Gold
Contact Mating Area Plating Material Thickness	.05 μm[2 μin]
Contact Type	Tab
Contact Current Rating (Max)	.5 A
Termination Features	

Rectangular Termination Post & Tail Thickness	.2 mm[.008 in]
Rectangular Termination Post & Tail Width	.6 mm[.024 in]
Termination Method to Printed Circuit Board	Surface Mount

Mechanical Attachment

PCB Mount Alignment Type	None
PCB Mount Retention Type	None
Mating Alignment	Without
Mating Alignment Type	None
PCB Mount Retention	Without
PCB Mount Alignment	Without
Connector Mounting Type	Board Mount

Housing Features

Centerline (Pitch)	.5 mm[.02 in]
Housing Material	High heat-resisted resin

Dimensions

Stack Height	4.5 mm[.177 in]
Stack Horgin	4.9 11111[.177 111]

Usage Conditions

Housing Temperature Rating	High
Operating Temperature Range	-30 - 105 °C[-22 - 221 °F]

Operation/Application



Assembly Process Feature	Pick and Place Cover
Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	1000
Packaging Type	Tape & Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Reflow solder capable to 245°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts













Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-1565359-1_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-1565359-1_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-1565359-1_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Product Specification

English

0.5mm Pitch Fine Mate Conn.

Japanese

Product Specification

Japanese