

#### SOLISTRAND

TE Internal #: 323271 Splices, 8 AWG Wire Size, 8 mm<sup>2</sup> Wire Size, Ovaled, .172 in [4.37 mm] Barrel Inside Diameter, 13100 – 20800 CMA Wire Size, Copper

#### View on TE.com >

Terminals & Splices > Splices



Wire Size: 8 mm<sup>2</sup>

Sealable: No

Splice Features: Ovaled

Barrel Inside Diameter: 4.37 mm [.172 in ]

#### Features

#### **Product Type Features**



Splice Accessory Type	Splice
Sealable	No
Splice Type	Parallel Splice
Serrated	Yes
Compatible With Discrete Wire Type	Solid, Stranded
Wire Insulation Support Retention Type	Non-Insulation Support
Configuration Features	
Compatible With Wire & Cable Type	Discrete Wire
Body Features	
Weight per Piece	1.148 g
Plating Material	Tin
Splice Features	Ovaled
Primary Product Material	Copper
Contact Features	
	100 µin

### 323271

Splices, 8 AWG Wire Size, 8 mm² Wire Size, Ovaled, .172 in [4.37 mm] Barrel Inside Diameter, 13100 – 20800 CMA Wire Size, Copper



Contact Plating Material	Tin
Barrel Type	Closed
Mechanical Attachment	
Wire Insulation Support	Without
Dimensions	
Wire Size	13100 – 20800 CMA
Barrel Inside Diameter	4.37 mm[.172 in]
Terminal Material Thickness	1.22 mm[.048 in]
Overall Product Length	9.78 mm[.385 in]
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	170 °C[338 °F]
Operation/Application	
Heavy Duty	No
Compatible With Wire Base Material	Copper
Industry Standards	
Government Qualified Splice	No

## Packaging Features

Packaging Quantity	100
Packaging Method	Loose Piece
Other	
Military Category	No
Product Compliance	
For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC

#### 323271

Splices, 8 AWG Wire Size, 8 mm<sup>2</sup> Wire Size, Ovaled, .172 in [4.37 mm] Barrel Inside Diameter, 13100 – 20800 CMA Wire Size, Copper



Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free


Solder Process Capability

Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**

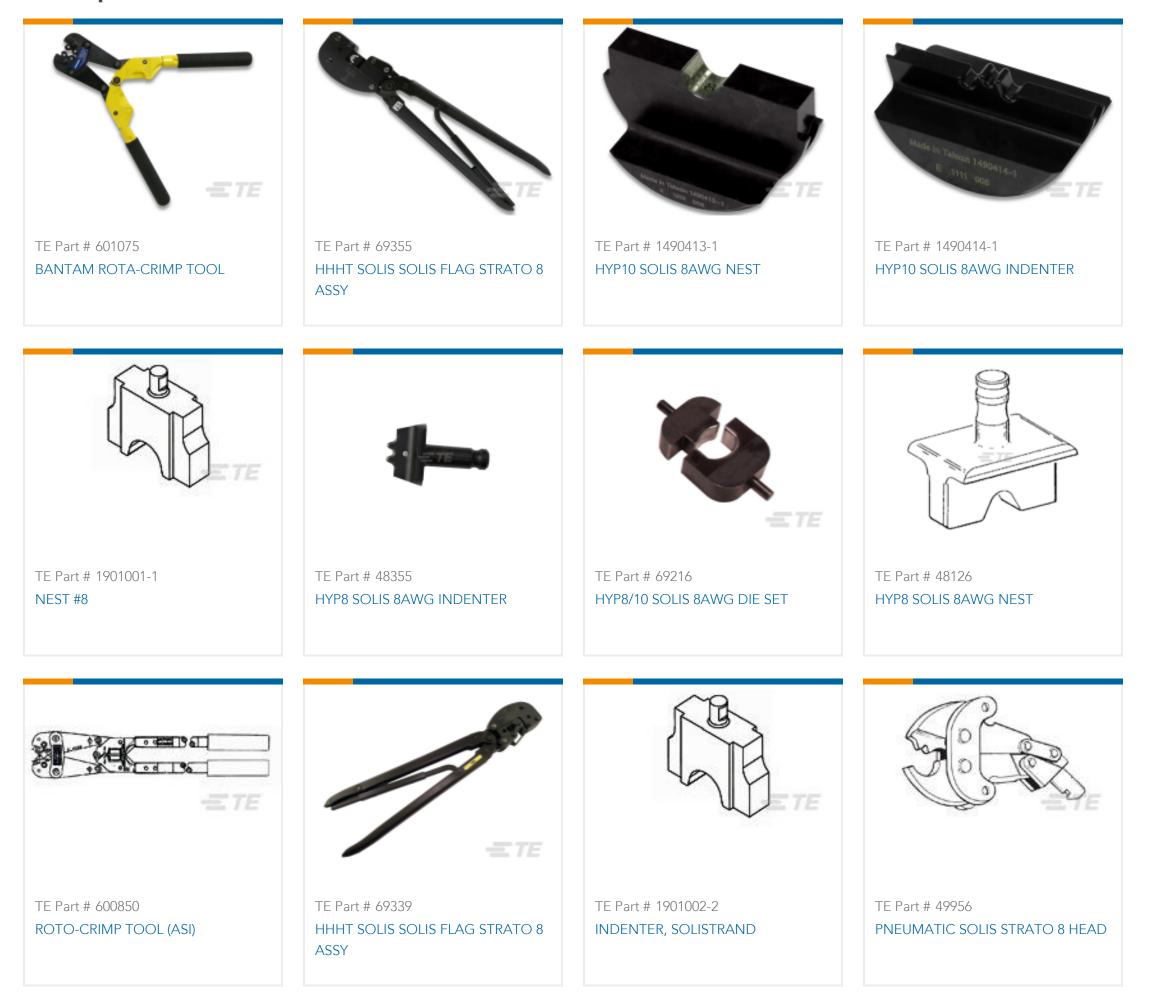

#### Documents

#### 323271

Splices, 8 AWG Wire Size, 8 mm<sup>2</sup> Wire Size, Ovaled, .172 in [4.37 mm] Barrel Inside Diameter, 13100 – 20800 CMA Wire Size, Copper



**Product Drawings** SPLICE, SOLIS PARA 8 English **CAD** Files 3D PDF 3D Customer View Model ENG\_CVM\_CVM\_323271\_F.2d\_dxf.zip English Customer View Model ENG\_CVM\_CVM\_323271\_F.3d\_igs.zip English Customer View Model ENG\_CVM\_CVM\_323271\_F.3d\_stp.zip English By downloading the CAD file I accept and agree to the **Terms and Conditions** of use. Agency Approvals

**UL Report** 

English

UL Report

English